

ToLEDo Superia T8 UNIVERSAL

ToLEDo Superia T8 Universal V3 4FT 2400LM 840
0029275



Product features

- 50,000 hours average rated life
- Last 2.5 times longer than 1200mm 36W fluorescent T8 Tri-phosphor lamp
- High switching cycles - 200,000X
- High lumen efficacy - 150lm/W
- Omni-directional light distribution and wide beam angle
- Minimum and maximum operating temperature: -20°C to 50°C
- Glass construction and polycarbonate end-caps
- Works only with compatible electronic ballast
- Must replace the fluorescent starter with LED dummy starter when used with magnetic/ CCG ballast
- Suitable for direct mains operation (AC 220-240V) with single-end AC input
- Ideal for factories, parking lots, supermarkets, department stores, schools and offices



PRODUCT OVERVIEW

Product name	ToLEDo Superia T8 Universal V3 4FT 2400LM 840
Technology	LED
Watt (Rated) (W)	16
Lamp shape	Tube, double-ended
Type	LED exchangeable
Lamp finish	Opal
Fixture rating	Open
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Residential & Consumer, Retail
ETIM Class	EC001959
E-number FI	4940795
Warranty	5 years
Luminous flux (lm)	2400
Colour temperature (K)	4000
Light colour	Cool White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	160
Photobiological Risk Group	RG0
Wattage (W)	16
Dimmable	No
Average life (Nominal) (h)	50000
IP rating	IP20
Product EAN number	5410288292755

DATA TABLE

General data

Product name	ToLEDo Superia T8 Universal V3 4FT 2400LM 840
Technology	LED
Watt (Rated) (W)	16

ToLEDo Superia T8 UNIVERSAL

ToLEDo Superia T8 Universal V3 4FT 2400LM 840

0029275

Lamp shape	Tube, double-ended
Type	LED exchangeable
Lamp finish	Opal
Fixture rating	Open
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Residential & Consumer, Retail
Operating temperature range (°C)	-20°C...+45°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001959
E-number FI	4940795
Warranty	5 years

Optical data

Luminous flux (lm)	2400
Luminous flux (Rated) (lm)	2400
Colour temperature (K)	4000
Light colour	Cool White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	160
Photobiological Risk Group	RG0
Lumen maintenance at end of nominal life (%)	70

Electrical data

Wattage (W)	16
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.9
Control gear required	No
No. Of switching cycles before premature failures	>100000
Dimmable	No
Inrush Current (A)	5.3
Inrush Duration (µs)	49
Lamp Energy Label (class)	D
Max. products per 16A C Breaker	52
Max. products per 16A B Breaker	85

Lifetime data

Lifespan L70 B50	50000
Average life (Nominal) (h)	50000
Average life (Rated) (h)	50000

Physical data

IP rating	IP20
Nominal Product Length (mm)	1213
Nominal Product Diameter (mm)	28

ToLEDo Superia T8 UNIVERSAL

ToLEDo Superia T8 Universal V3 4FT 2400LM 840
0029275

Weight (kg) 0.18


Packaging

Single packaging type	Carton
Product EAN number	5410288292755
Packaging single length / height (cm)	121.0
Packaging single width (cm)	3.0
Packaging single depth (cm)	3.0
DUN14 (outer)	15410288292752
Units per outer package	10
Packaging outer length / height (cm)	120.7
Packaging outer width (cm)	21.0
Packaging outer depth (cm)	11.5


Safety data

Optimal operating condition (°C)	-20-45
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Suitable for household illumination	Yes
Safety message	None

PHOTOMETRY

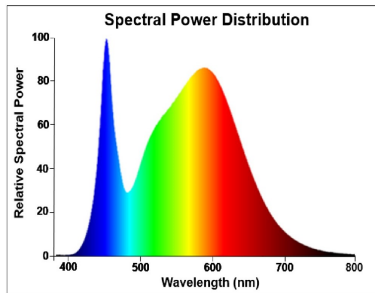

TECHNICAL DRAWINGS




ToLEDo Superia T8 UNIVERSAL
ToLEDo Superia T8 Universal V3 4FT 2400LM 840
0029275



SYLVANIA

0029275

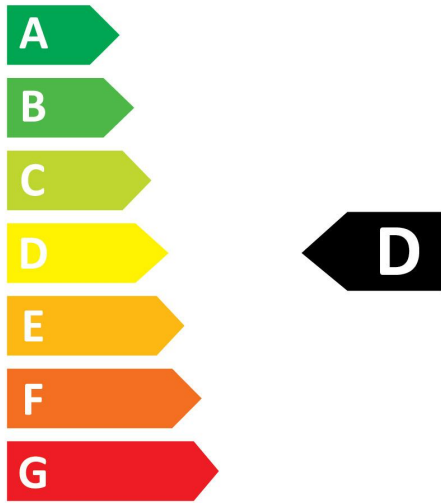

16
kWh/1000h



2019/2015


SYLVANIA

ToLEDo Superia T8 UNIVERSAL

ToLEDo Superia T8 Universal V3 4FT 2400LM 840
0029275



0029275

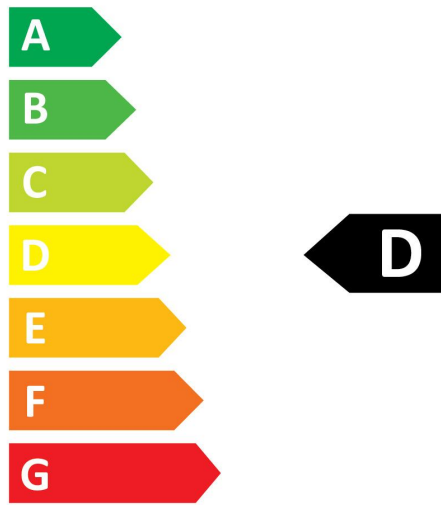

16
kWh/1000h



2019/2015