


Wayline with Corridor function
Wayline 1200 MWCOR 3100lm 840
0048940



Product features

- LED batten, T8 replacement, ease of installation through 2 part push-in design of the housing (safety cable included), through wiring capability, steel housing, 3100lm, 24W, 129lm/W, 4000K, CRi80, 3 step MacAdam ellipse, symmetric wide beam angle, Class I, 90000 hrs L80B20 lifespan, DALI driver, corridor function with microwave presence sensor, IK08, IP20, 1220 x 70 x 76.5mm (L x W x H) dimensions, 1.73kg.

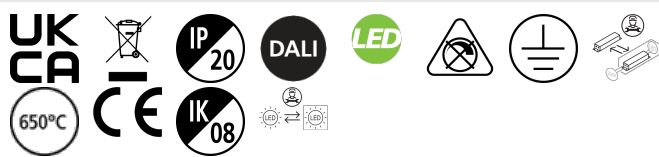

PRODUCT OVERVIEW








Product name	Wayline 1200 MWCOR 3100lm 840
Technology	LED
Cap/Base	N/A
Housing	Steel
General application	Logistics & Industry
ETIM Class	EC000109
E-number FI	4278327
Warranty	5 years
Fixture luminous flux (lm)	3100
Luminaire efficacy (lm/W)	129
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	115
Photobiological Risk Group	RG1
Total power consumption (W)	24
Electrical protection	Class I
Dimmable	No
Dimming method	DALI-2
LED Flickering Rate	Low (6% - 20%)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK08
Product EAN number	5410288489407

PHOTOMETRY

Wayline with Corridor function

Wayline 1200 MWCOR 3100lm 840

0048940



TECHNICAL DRAWINGS

