



Features

- LED batten, T8 replacement, ease of installation through 2 part push-in design of the housing (safety cable included), through wiring capability, steel housing, 3200lm, 24W, 133lm/W, 4000K, CRI80, 3 step MacAdam ellipse, symmetric wide beam angle, Class I, 90000 hrs L80B20 lifespan, non-dimmable driver, MW sensor for 360° detection up to 8m range at 6m mounting height, IK08, IP20, 1220 x 70 x 76.5mm (LxWxD) dimensions, 1.44kg weight.


Product Overview

Product name	Wayline 1200 MW 3200lm 840
Technology	LED
Cap/Base	N/A
Housing	Steel
General application	Logistics & Industry
ETIM Class	EC000109
E-number FI	4278322
Fixture luminous flux (lm)	3200
Luminaire efficacy (lm/W)	133
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	115
Photobiological Risk Group	RG1
Total power consumption (W)	24
Electrical protection	Class I
LED Flickering Rate	Low (6% - 20%)
Housing colour	RAL9016
IP rating	IP20
IK rating	IK08

Wayline 1200 MW 3200lm 840
0048932

Product EAN number	5410288489322
Warranty	5 years
Dimming method	N/A

Photometry

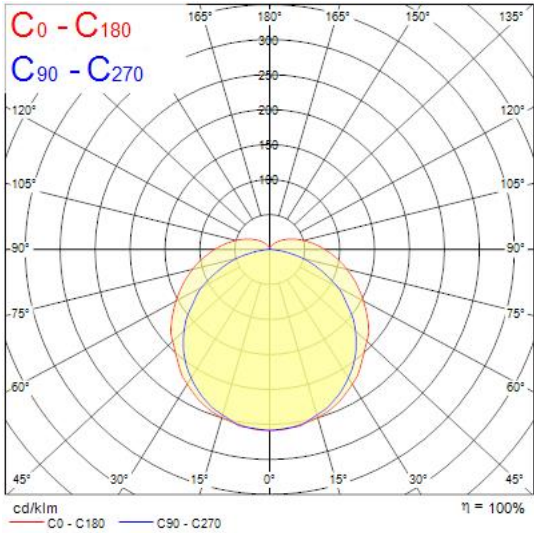

Technical drawings

