

# Product data sheet Spirotech

## Product name

**SpiroTop -1/2" -St.Steel -HighT+P**

## Product properties

A stainless steel air vent for high-temperature and high-pressure systems (max. 200 °C, max. 25 bar) with a 1/2" connection

- For high temperature and high-pressure system environments
- Special valve construction ensures valve is closed completely
- Long lasting valve seat
- Solid plastic (TPX), robust floats which cannot rupture
- Applicable with 50/50 Ethylene Glycol / Water (Volume)
- Large air gap between the valve and the water (at least 40 mm) prevents valve contamination and leaks
- 1/2" connection prevents pipette effect


## Article number

**AB050/R004**

## Product image



## Product dimensions

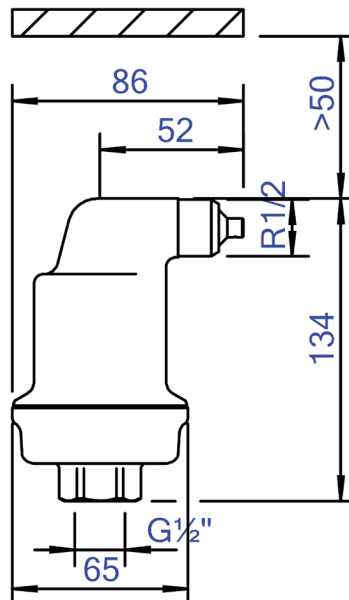

# Product data sheet Spirotech

## ETIM product data

Height	134 mm
Housing material	Stainless steel
With leakage protection	No
With air intake barrier	No
Angle connection	No
Nominal diameter	1/2 inch (15)

Material float	Plastic
Max. medium temperature (continuous)	200 °C
Lockable	No
Max. operating pressure at 20 °C	25 bar
Material quality float	Polymethylpentene (PMP)

### Disclaimer

This product sheet has been compiled with the greatest possible care. Nevertheless, it may contain errors or omissions. For the most current and correct information we refer you to our website

