


## Walraven Beam Clamp Model O

(K2015)

for clamping on beam flange

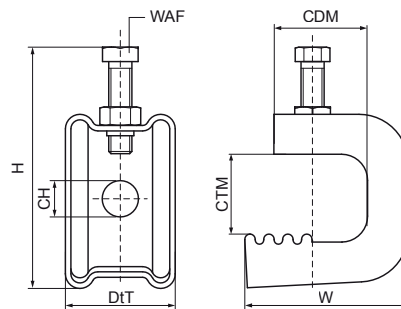

### Features & benefits

- for a solid fixing to steel construction without the need for welding or drilling
- up to flange thickness 45 mm
- with hole Ø 14 mm for fixing of Walraven IC-clamp, stud bolt or S-Hook
- with serration for increased security
- material: steel
- surface treatment: zinc flake coated

| Productnumber    | Maximum Clamping Thickness | Maximum Clamping Depth | Total Height | Total Width | Total Depth | Connection Hole | Thread Size | Width Across Flats | Maximum Allowed Load Faz |
|------------------|----------------------------|------------------------|--------------|-------------|-------------|-----------------|-------------|--------------------|--------------------------|
| Reference Letter | CTM                        | CDM                    | H            | W           | DtT         | CH              | TS          | WAF                | F <sub>0,z</sub>         |
| Unit description | mm                         | mm                     | mm           | mm          | mm          | mm              |             | mm                 | N                        |
| 6077020          | 18                         | 20                     | 84           | 45          | 41          | 14              | -           | 13                 | 1,100                    |
| 6077030          | 30                         | 30                     | 100          | 60          | 41          | 14              | -           | 13                 | 1,200                    |
| 6077045          | 45                         | 35                     | 110          | 70          | 41          | 14              | -           | 13                 | 1,300                    |