Walraven Swivel Beam Clamp Model E

(K2025)

for clamping on beam flange

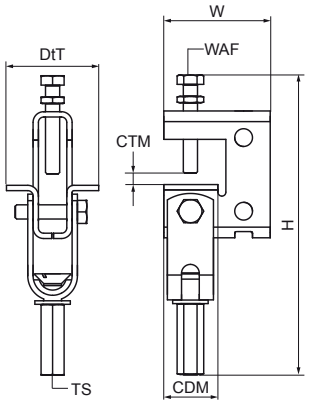

Features & benefits

- multidirectional clamp
- for suspension of light components to pitched beams without welding or drilling
- up to flange thickness 24 mm
- articulation to 30° sideways, 45° forwards
- material: steel
- surface treatment: zinc flake coated

Productnumber	Maximum Clamping Thickness	Maximum Clamping Depth	Total Height	Total Width	Total Depth	Thread Size	Width Across Flats	Maximum Allowed Load Faz
Reference Letter	*CTM*	*CDM*	*H*	*W*	*DtT*	*TS*	*WAF*	*Fa,z*
Unit description	*mm*	*mm*	*mm*	*mm*	*mm*		*mm*	*N*
6076000	24	30	175	60	52	M10	13	2,800