

# Concord

## BEACON 85CRI 4K MEDIUM BEAM L3 TRAILING EDGE WHITE 2059673



### Features

- Integrated LED spotlight, white RAL 9016, compact and minimalist design, ideal for retail and display applications, die-cast aluminium body, passive cooling heatsink, beam angle: 38° medium beam, optics: Aluminium reflector, colour temperature: 4000K neutral white, total system power: 21W, total fixture output: 2348lm, luminaire efficacy: 112lm/W, LOR: 100%, colour rendering: Ra 85 typical, LED Chromacity: 3 step MacAdam ellipse, lifetime: >72,000 hours at L80B50, energy class: A++, A+, A, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: 500mA, electronic driver, trailing edge dimmable, power factor: 0.9 electrical protection: CLASS II, 3-circuit track adaptor, suitable for Concord Lytespan 3 track, ingress protection rating: IP20, suitable for internal environment only, horizontal rotation: 355°, vertical tilt: 90°, dimensions: Ø80x130x190mm, weight: 0.96kg.

### Product Overview


Product name	BEACON 85CRI 4K MEDIUM BEAM L3 TRAILING EDGE WHITE
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Track mounting
Environment	Internal
E-number FI	4280829
E-number SE	7401250
Fixture luminous flux (lm)	2348
Luminaire efficacy (lm/W)	112
LOR (%)	100

# Concord

## BEACON 85CRI 4K MEDIUM BEAM L3 TRAILING EDGE WHITE 2059673

Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	85
Colour Consistency (SDCM)	3
Photobiological Risk Group	RG1
Total power consumption (W)	21
Electrical protection	Class II
Control gear type	Electronic ballast
Housing colour	White
IP rating	IP20
IK rating	IK02
Product EAN number	5025768596737
Warranty	5 years

### Photometry

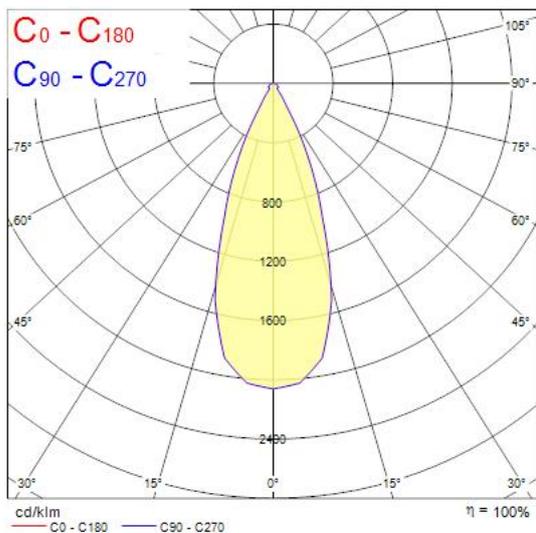

### Technical drawings

