

10472000	DATA SHEET	
Valid from: 15.06.2026	EPIC® H-A 32 AG	

Description

- The large, robust housing for two inserts of size 16.



General characteristics

Series	H-A 32
Version	Panel mount base
Locking	single lever
Protection (DIN EN 60529)	IP 65 (latched)
Temperature range	-40°C to +125°C

Materials and surfaces

Housing	Aluminium alloy, powder-coated, grey
Lever	Stainless steel
Gasket	NBR

Approvals


UL File Number	In preparation
----------------	----------------

Standards

Safety Standard	IEC 61984
-----------------	-----------

10472000	DATA SHEET	
Valid from: 15.06.2026	EPIC® H-A 32 AG	

Technical Drawings

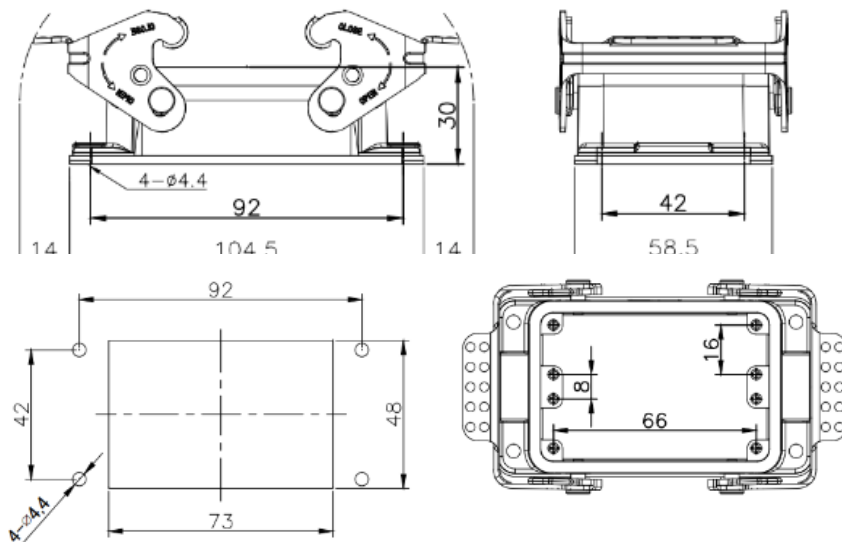

Industrial machinery and plant engineering



Mechanical resistance



Robust



Waterproof

Info

Compact, robust metal housings size H-A 32

Application range

Machine and equipment manufacturing

Control engineering

Electronic laboratory

Remark

Photographs are not to scale and do not represent detailed images of the respective products.

Creator: LEBU1 / PDP Released: THB01 / PDP	Document: DB10472000EN Version: 01	Page 2 of 2
---	---------------------------------------	-------------