


ToLED_o SUPERIA T8 CCG L1200 2760LM 830 75K PET SL

Item No: 0030245


SYLVANIA



Technical Assets

Dimensions (mm)

Photometrics

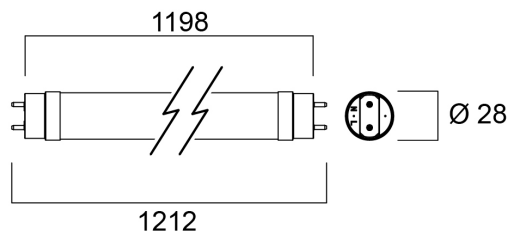

ToLEDo SUPERIA T8 CCG L1200 2760LM 830 75K PET SL

Item No: 0030245



General data

Product name	ToLEDo SUPERIA T8 CCG L1200 2760LM 830 75K PET SL
Technology	LED
Lamp shape	Tube, double-ended
Cap/Base	G13
Lamp finish	Frosted/Coated
General application	Hospitality, Logistics & Industry, Residential & Consumer
Operating temperature range (°C)	-20°C...+55°C
ETIM Class	EC001959
E-number FI	4941350
Warranty	5 years

Optical data

Useful luminous flux (Φ_{use})	2760
Correlated colour temperature (k)	3000
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	170
Photobiological Risk Group	RG0

Electrical data

Power consumption (W)	16.8
Wattage (W)	16.8
Primary Supply/Product voltage - min (V)	220
Lamp power factor	0.9
Control gear required	No
Inrush Current (A)	10.4
Inrush Duration (μ s)	50
Lamp Energy Label (class)	C

Lifetime data

Lifespan L70 B50	75000
------------------	-------

Physical data

IP rating	IP20
Nominal Product Length (mm)	1198
Nominal Product Diameter (mm)	28
Weight (kg)	0.19

Packaging

Product EAN number	5410288302454
Packaging single width (cm)	2.9
Packaging single depth (cm)	2.9
DUN14 (inner)	15410288302451
Packaging outer length / height (cm)	130.0

Safety data

Optimal operating condition (°C)	-20-55
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Safety message	Suitable for totally enclosed fixture