Data Sheet | Item Number: 772-277/080-000

Supply module; 5 x 2.5 mm² + 2 x 1.5 mm²; 5-pole; Cod. B; with strain relief housing; 4,00 mm²; pink


https://www.wago.com/772-277/080-000





Color: pink



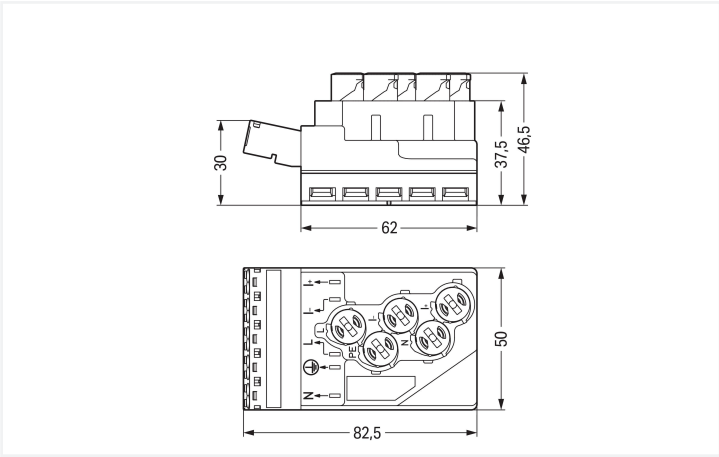

Supply module *WINSTA*® IDC B coding

The *WINSTA*® IDC supply module with protection type IP20 supports fast, reliable installation. Our pluggable installation connectors with spring pressure connection technology function completely without screw connections. They allow resource-efficient, error-free installation in a large number of possible uses. The coding options reduce installation errors, allowing fast, secure wiring of all components. The pluggable installation connector is protected in accordance with protection type IP20 (When mated: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!)). That results in the fact that users' fingers will never come into contact with electrified elements. Pluggable installation connectors with B coding from the *WINSTA*® IDC line are available in gray, light green, or pink, allowing you to distinguish different circuits, for example for pumps, lighting, or sun blinds. Usage-specific pole marking is possible in addition. This pluggable installation connector can be used for electrical currents up to 25 A. Thus the product is also suitable for high power loads.

Push-in CAGE CLAMP® spring pressure connection technology – pluggable installation instead of laborious screw connections!

WINSTA® is the pluggable connection system that is optimally tailored to the strict requirements of electrical installation. It ensures error-free installation of cables and components, quickly and reliably. Choose durability and quality – with protection type IP20 from WAGO makes the installation of electrical components noticeably easier.

- pluggable installation connectors with protection against mismating
- products perfectly tailored to your requirements guarantee safe use
- with B coding for use in automation of processes, such as lighting technology, for instance
- flexible installation to save space
- quick replacement of defective units during ongoing operation

Electrical data

Ratings per IEC/EN

Ratings per	IEC/EN 60664-1
Nominal voltage (III/3)	400 V
Rated impulse withstand voltage (III / 3)	6 kV
Rated current	25 A
Legend (ratings)	(III / 3) ≙ Overvoltage category III / Pollution degree 3

General information

Note on contact resistance	approx. 1 mΩ of contact resistance approx. 0.25 mΩ contact transition plug/socket

Connection Data

Clamping units	10
Total number of potentials	5

Connection 1

Connection technology	Push-in CAGE CLAMP®
Actuation type	Operating tool Push-in
Nominal cross-section	4 mm² / 12 AWG
Solid conductor	0.5 … 4 mm² / 20 … 12 AWG
Solid conductor; push-in termination	1.5 … 4 mm² / 16 … 12 AWG
Stranded conductor	0.5 … 2.5 mm² / 20 … 14 AWG
Fine-stranded conductor	0.5 … 4 mm² / 20 … 12 AWG
Fine-stranded conductor; with insulated ferrule	0.25 … 1.5 mm² / 20 … 16 AWG
Fine-stranded conductor; with uninsulated ferrule	0.25 … 2.5 mm² / 20 … 14 AWG
Fine-stranded conductor; with ferrule; push-in termination	1.5 mm² / 16 AWG
Strip length	9 mm / 0.35 inches
Pole number	5

Connection 2

Connection technology	IDC connection

Physical data

Width	50 mm / 1.969 inches
Height	46.5 mm / 1.831 inches
Depth	82.5 mm / 3.248 inches

Mechanical data

Use	Control technology
Coding	B
Variable coding	No
Marking	N ⏚ L I- I+
Potential marking	N ⏚ L I- I+
Retention force of a plug-in connection	When locked: > 80 N
Protection type	IP20; When mated: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!)
Suitable	for flat cable 5 x 2.5 mm², 5 x 4 mm², 5 x 2.5 mm² + 2 x 1.5 mm²

Continued on next page

Plug-in connection

Mismating protection	Yes
Note on mismating protection	All *WINSTA*® components are 100% protected against mismating when: a.) plugging different numbers of poles b.) plugging while rotated 180 c.) plugging while laterally staggered d.) plugging one pole

Material data

Note (material data)	Information on material specifications can be found here
Color	pink
Insulation material (main housing)	Polyamide (PA66)
Flammability class per UL94	V0
Contact material	Copper or copper alloy; surface-treated
Contact Plating	Tin
Fire load	2.389 MJ
Weight	97.3 g

Environmental requirements

Continuous operating temperature	-35 … +85 °C
Note on continuous operating temperature	Cable for temperatures ≤ 70 °C (including halogen-free) Flat cable for temperatures –15 °C to ≤ 70 °C (including halogen-free) Insulating parts for temperatures ≤ 105 °C

Commercial data

PU (SPU)	10 pcs
Packaging type	Box
Country of origin	DE
GTIN	4066966154672
Customs tariff number	85366990990

Product Classification

UNSPSC	39121421
eCl@ss 10.0	27-44-06-01
ETIM 9.0	EC002588
ETIM 10.0	EC002588
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status	Compliant,No Exemption

Approvals / Certificates

Declarations of conformity and manufacturer's declarations

Approval	Standard	Certificate Name
EU-Declaration of Conformity WAGO GmbH & Co. KG	-	-

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 772-277/080-000

1 Compatible Products

1.1 Required Accessories

1.1.1 Installation

1.1.1.1 Mounting accessories



Item No.: 772-260
Mounting plate; for power supply and tap-off modules; Plastic; black

1.2 Optional Accessories

1.2.1 Cables and connectors

1.2.1.1 Flat cable



Item No.: 897-252
Flat cable; B2ca; 5G 2.5 mm²; halogen-free; 3L + N + PE; 0.6/1 kV; 2,50 mm²; green



Item No.: 897-262
Flat cable; Cca; 5G 2.5 mm² + 2 x 1.5 mm²; halogen-free; 3L + N + PE + 2 buses; 0.6/1 kV; 2,50 mm²; violet



Item No.: 897-261
Flat cable; Eca; 5G 2.5 mm² + 2 x 1.5 mm²; PVC; 3L + N + PE + 2 buses; 0.6/1 kV; 2,50 mm²; violet



Item No.: 897-251
Flat cable; Eca; 5G 2.5 mm²; PVC; 3L + N + PE; 0.6/1 kV; 2,50 mm²; green



Item No.: 897-453
Flat cable; Eca; 5G 4 mm²; halogen-free; 3L + N + PE; 0.6/1 kV; 4,00 mm²; black

1.2.2 Tool

1.2.2.1 Operating tool



Item No.: 210-720
Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured



Item No.: 210-635
Operating tool; Blade: 6.5 x 1.2 mm; multicoloured



Item No.: 210-636
Operating tool; Blade: 6.5 x 1.2 mm; with a partially insulated shaft; multicoloured

Continued on next page

Installation Notes

Conductor termination



Insert flat cable into base (observe coding!).




Mount IDC module flush with the base.

Should the IDC module jam during mounting, turn the upper part by 180° and remount it.



Screw down contact elements to the stop.



Connecting an installation cable to the supply module.

Stripped, solid conductors are simply pushed into unit. Open clamp via screwdriver to insert stripped, fine-stranded conductors.



Secure supply cable via strain relief housing.




Tighten strain relief screw using a screwdriver.

Installation



The mounting plate can be centrally mounted, or attached via outboard attachment points using 770-601 Mounting Pins.



Snapping a supply or tap-off module onto a mounting plate.

Security



Use insulating tape to seal the contact holes in the flat cable after removing a module.