




### Features

- T-shape connection unit for opal diffuser version of Otao Linear range, RAL9011 (black) finishing, direct distribution, only 3000K/4000K LED light sources included, feed by next straight luminaire, shipped with 3x fast connectors and additional replacement electrical connectors, 50mm wide extruded aluminium profile, nominal size: 290x170x50x73mm.

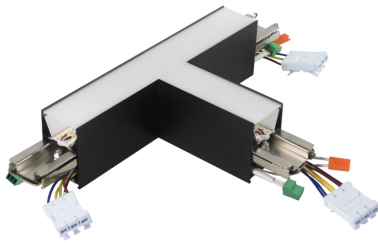

### Product Overview

<b>Product name</b>	OTAO LINEAR CORN-T OPAL 830/840 BK
<b>Technology</b>	LED (3 SDCM)
<b>Cap/Base</b>	N/A
<b>Housing</b>	Aluminium
<b>Mount</b>	Ceiling recessed mounting, Ceiling surface mounting, Wall surface mounted, Suspended
<b>General application</b>	Office, Education
<b>ETIM Class</b>	EC002556
<b>Fixture luminous flux (lm)</b>	950
<b>Luminaire efficacy (lm/W)</b>	127
<b>Correlated colour temperature (k)</b>	4000
<b>Light colour</b>	Warm White or Neutral White
<b>CRI (Ra)</b>	80
<b>Colour Variation Initial (SDCM)</b>	3
<b>Beam Angle (°)</b>	110
<b>Glare control</b>	< 28

## OTAO LINEAR CORN-T OPAL 830/840 BK 0040810

Photobiological Risk Group	RG0
Total power consumption (W)	7.5
Electrical protection	Class III
Dimmable	No
Housing colour	RAL9011
IP rating	IP20
IK rating	IK03
Product EAN number	5410288408101
Warranty	5 years
Dimming method	N/A

### Technical drawings

