


Concord

BEACON 85CRI 4K WIDE BEAM L3 TRAILING EDGE BLACK 2059674

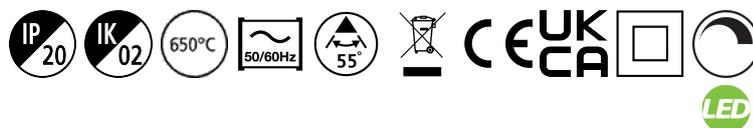

Features

- Integrated LED spotlight, black RAL 9005, compact and minimalist design, ideal for retail and display applications, die-cast aluminium body, passive cooling heatsink, beam angle: 55° wide beam, optics: Aluminium reflector, colour temperature: 4000K neutral white, total system power: 21W, total fixture output: 2301lm, luminaire efficacy: 110lm/W, LOR: 100%, colour rendering: Ra 85 typical, LED Chromacity: 3 step MacAdam ellipse, lifetime: >72,000 hours at L80B50, energy class: A++, A+, A, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: 500mA, electronic driver, trailing edge dimmable, power factor: 0.9 electrical protection: CLASS II, 3-circuit track adaptor, suitable for Concord Lytespan 3 track, ingress protection rating: IP20, suitable for internal environment only, horizontal rotation: 355°, vertical tilt: 90°, dimensions: Ø80x130x190mm, weight: 0.96kg.

Product Overview


Product name	BEACON 85CRI 4K WIDE BEAM L3 TRAILING EDGE BLACK
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Track mounting
Environment	Internal
E-number FI	4280830
E-number SE	7401251
Fixture luminous flux (lm)	2301
Luminaire efficacy (lm/W)	110
LOR (%)	100

Concord

BEACON 85CRI 4K WIDE BEAM L3 TRAILING EDGE BLACK 2059674

Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	85
Colour Consistency (SDCM)	3
Photobiological Risk Group	RG1
Total power consumption (W)	21
Electrical protection	Class II
Control gear type	Electronic ballast
Housing colour	Black
IP rating	IP20
IK rating	IK02
Product EAN number	5025768596744
Warranty	5 years


Photometry

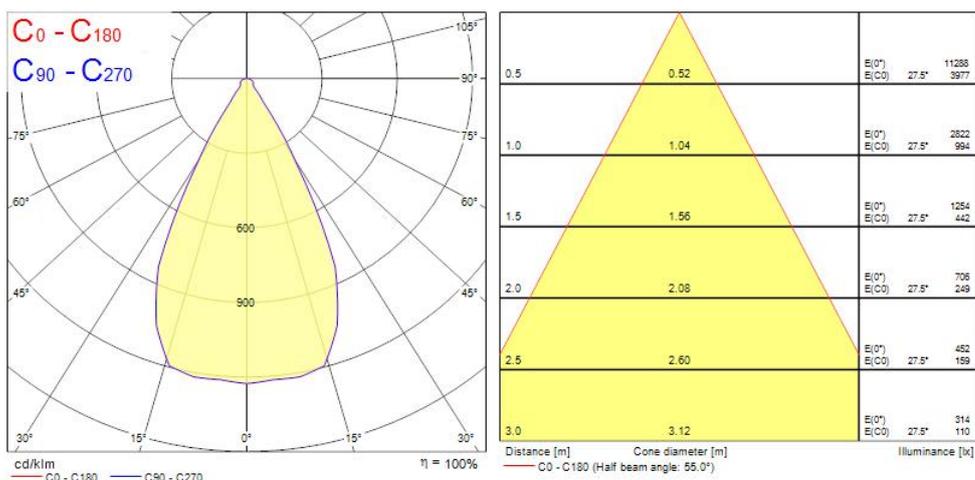

Concord

BEACON 85CRI 4K WIDE BEAM L3 TRAILING EDGE BLACK 2059674

Technical drawings

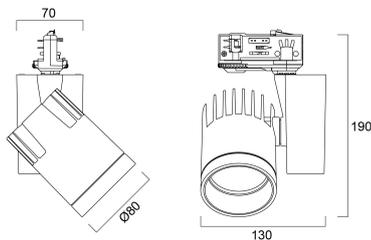

Data table

GENERAL DATA

Product name	BEACON 85CRI 4K WIDE BEAM L3 TRAILING EDGE BLACK
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Track mounting
Environment	Internal
Performance ambient temperature Tq (°C)	25
E-number FI	4280830
E-number SE	7401251
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	2301
Luminaire efficacy (lm/W)	110
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	85
Colour Consistency (SDCM)	3

Concord

BEACON 85CRI 4K WIDE BEAM L3 TRAILING EDGE BLACK 2059674

Adjustable chromaticity	N
Photobiological Risk Group	RG1

ELECTRICAL DATA

Total power consumption (W)	21
Primary Supply/Product voltage - min (V)	220
Lamp power factor	0.9
Electrical protection	Class II
Control gear required	No
Control gear type	Electronic ballast
Drive current (mA)	500
Inrush Current (A)	45
Inrush Duration (μ s)	20
Glow Wire Test ($^{\circ}$ C)	650
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	48

LIFETIME DATA

Lifespan L70 B50	72000
Lifespan L70 B10	72000
Lifespan L80 B50	72000
Lifespan L80 B20	72000
Lifespan L80 B10	72000
Lifespan L90 B50	43000
Lifespan L90 B20	36000
Lifespan L90 B10	33000

PHYSICAL DATA

Housing colour	Black
IP rating	IP20
IK rating	IK02
Nominal Product Length (mm)	70

Concord

BEACON 85CRI 4K WIDE BEAM L3 TRAILING EDGE BLACK 2059674

Nominal Product Width (mm)	130
----------------------------	-----

Weight (kg)	0.7
-------------	-----

PACKAGING

Single packaging type	Carton
-----------------------	--------

Product EAN number	5025768596744
--------------------	---------------

Packaging single width (cm)	17.2
-----------------------------	------

Packaging single depth (cm)	18.2
-----------------------------	------

DUN14 (outer)	05025768596744
---------------	----------------

Packaging outer length / height (cm)	16.0
--------------------------------------	------

SAFETY DATA

Special purpose lamp	No
----------------------	----

Dry applications use only	No
---------------------------	----

Suitable for household illumination	No
-------------------------------------	----