


Concord

MYRIAD IP65 4000K PHASE DIM WHITE EM 2049530



Features

- MYRIAD IP65 4000K PHASE DIM WHITE EM



Product Overview

Product name	MYRIAD IP65 4000K PHASE DIM WHITE EM
Technology	LED
Cap/Base	N/A
Mount	Ceiling recessed mounting
Environment	Interior
Fixture luminous flux (lm)	1050
Luminaire efficacy (lm/W)	88
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Photobiological Risk Group	RG1
Luminous flux (emergency) (lm)	347
Total power consumption (W)	16
Electrical protection	Class II
Control gear type	LED driver constant current
Control gear mounting	Integral
IP rating	IP65/20
IK rating	IK02

Concord

MYRIAD IP65 4000K PHASE DIM WHITE EM 2049530





Product EAN number

5025768495306

Warranty

5 years


Photometry

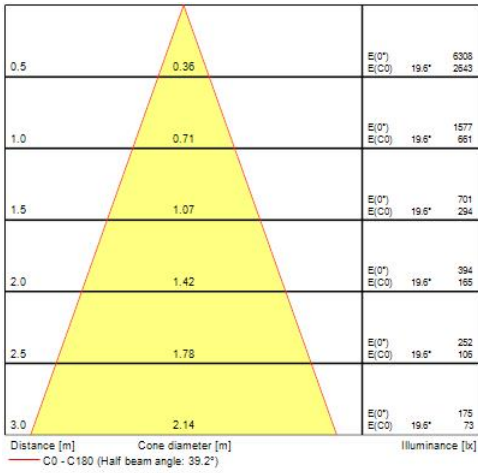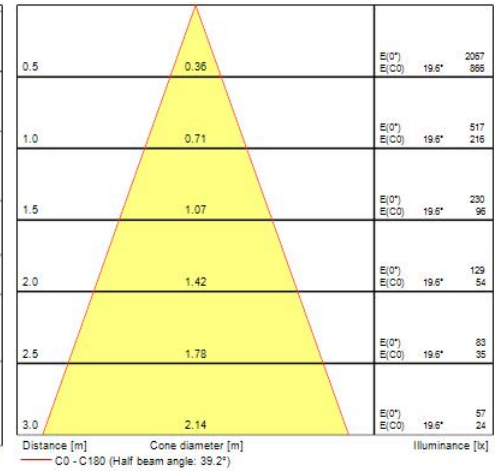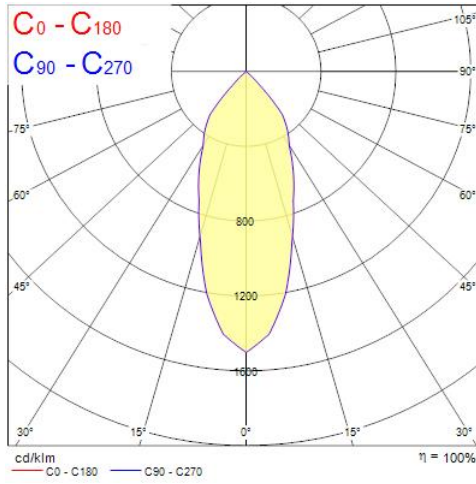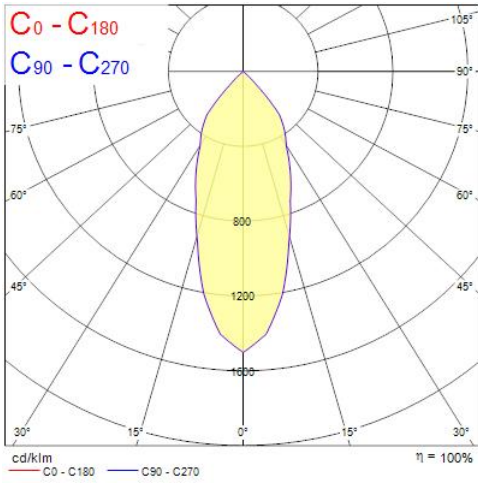

Concord

MYRIAD IP65 4000K PHASE DIM WHITE EM 2049530

Technical drawings

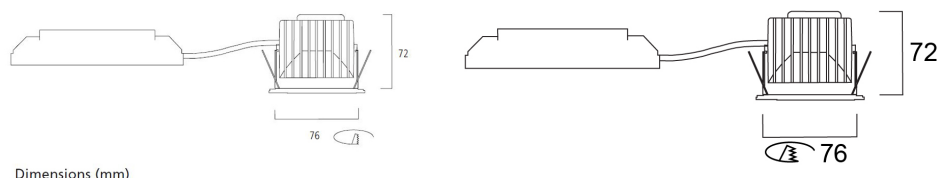

Data table

GENERAL DATA

Product name	MYRIAD IP65 4000K PHASE DIM WHITE EM
Technology	LED
Cap/Base	N/A
Mount	Ceiling recessed mounting
Environment	Interior
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	1050
Luminaire efficacy (lm/W)	88
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Adjustable chromaticity	N

Concord

MYRIAD IP65 4000K PHASE DIM WHITE EM 2049530

Photobiological Risk Group	RG1
----------------------------	-----

Luminous flux (emergency) (lm)	347
--------------------------------	-----

ELECTRICAL DATA

Total power consumption (W)	16
-----------------------------	----

Primary Supply/Product voltage - min (V)	220
--	-----

Electrical protection	Class II
-----------------------	----------

Control gear required	No
-----------------------	----

Control gear type	LED driver constant current
-------------------	-----------------------------

Control gear mounting	Integral
-----------------------	----------

Drive current (mA)	250
--------------------	-----

Energy Efficiency Class (A->G) of contained light source	E
--	---

Nominal Frequency (Hz)	50/60Hz
------------------------	---------

LIFETIME DATA

Lifespan L70 B50	100000
------------------	--------

Lifespan L80 B20	100000
------------------	--------

Lifespan L90 B10	68500
------------------	-------

PHYSICAL DATA

IP rating	IP65/20
-----------	---------

IK rating	IK02
-----------	------

Diffuser material	Glass
-------------------	-------

Nominal Product Diameter (mm)	90
-------------------------------	----

Weight (kg)	1.42
-------------	------

Recessed Depth (mm)	72
---------------------	----

PACKAGING

Single packaging type	Carton
-----------------------	--------

Product EAN number	5025768495306
--------------------	---------------

Packaging single width (cm)	25.0
-----------------------------	------

Packaging single depth (cm)	12.5
-----------------------------	------

Concord

MYRIAD IP65 4000K PHASE DIM WHITE EM

2049530

DUN14 (outer)	05025768495306
---------------	----------------

Packaging outer length / height (cm)	27.5
--------------------------------------	------

SAFETY DATA

Special purpose lamp	No
----------------------	----

Dry applications use only	No
---------------------------	----

Suitable for household illumination	No
-------------------------------------	----