


Walraven BISOFIX® E25

(D0326)

for insulated pipes

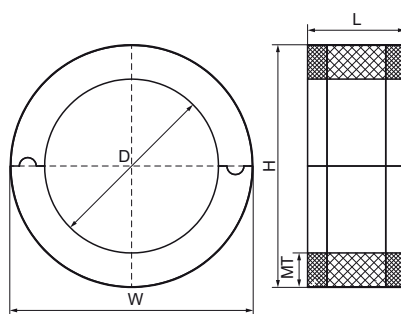

Features & benefits

- for combination with elastomeric foam insulation
- vapourproof glueable with pipe insulation
- does not contain CFC, HCFC, formaldehyde or cadmium
- fire class B2
- PIR density for $D < 80\text{mm}$ = 80kg/m^3
- PIR density for $D > 80\text{mm}$ = 120kg/m^3
- temperature range $-45\text{ }^{\circ}\text{C}$ - $+105\text{ }^{\circ}\text{C}$



Product Number	NRF Number	Outside Pipe Diameter	DN	Total Height	Total Width	Total Length	Material Thickness	Operating Temperature	Maximum Allowed Load Faz
Reference Letter		D	D	H	W	L	MT		Fa,z
Unit description		mm		mm	mm	mm	mm	CEL	N
I250000012	1389802	12		63	63	50	25.30	-45 - 105	100
I250000015	1389803	15		66	66	50	25.30	-45 - 105	100
I250000018	1389804	17.2 - 18	DN 10	69	69	50	25.30	-45 - 105	100
I250000022	1389805	21.3 - 22	DN 15	75	75	50	26.70	-45 - 105	100
I250000028	1389806	26.9 - 28	DN 20	79	79	50	25.30	-45 - 105	100
I250000035	1389807	33.7 - 35	DN 25	88	88	50	26.50	-45 - 105	100
I250000042	1389808	42.4	DN 32	100	100	50	28.80	-45 - 105	150
I250000048	1389809	48.3	DN 40	100	100	50	25.90	-45 - 105	225
I250000054	1389810	54		105	105	50	25.30	-45 - 105	225
I250000057	1389811	57		108	108	50	25.30	-45 - 105	225
I250000060	1389812	60.3	DN 50	111	111	50	25.30	-45 - 105	350
I250000064	1389813	64		129	129	50	32.30	-45 - 105	350
I250000070	1389814	70		135	135	50	32.30	-45 - 105	425
I250000076	1389815	76.1	DN 65	141	141	50	32.30	-45 - 105	575
I250000089	1387965	88.9	DN 80	154	154	50	32.30	-45 - 105	875
I250000102	1387966	101.6		166	166	50	32.30	-45 - 105	1,000
I250000108	1387967	108		176	176	50	34.00	-45 - 105	1,075
I250000114	1387968	114.3	DN 100	179	179	50	32.30	-45 - 105	1,250
I250000133	1387969	133		198	198	100	32.30	-45 - 105	1,475
I250000140	1387970	139.7	DN 125	205	205	100	32.70	-45 - 105	1,700
I250000160	1387971	159 - 160		225	225	100	32.30	-45 - 105	1,950
I250000168	1387972	168.3	DN 150	233	233	100	32.30	-45 - 105	2,125
I250000219	1387973	219.1	DN 200	284	284	100	32.30	-45 - 105	3,525
I250000356		356		421	421	100	32.00	-45 - 105	