


Myriad V IP65 White Bezel

MYRIAD IP65 3000K DALI WHITE
2049537

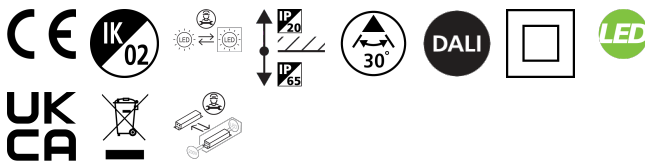

PRODUCT OVERVIEW

Product name	MYRIAD IP65 3000K DALI WHITE
Technology	LED
Cap/Base	N/A
Mount	Ceiling recessed mounting
Environment	Interior
E-number SE	7462015
Warranty	5 years
Fixture luminous flux (lm)	1069
Luminaire efficacy (lm/W)	107
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Photobiological Risk Group	RG1
Total power consumption (W)	10
Electrical protection	Class II
Control gear type	Electronic ballast
Control gear mounting	Integral
IP rating	IP65/20
IK rating	IK02
Product EAN number	5025768495375

DATA TABLE

General data

Product name	MYRIAD IP65 3000K DALI WHITE
Technology	LED
Cap/Base	N/A
Mount	Ceiling recessed mounting
Environment	Interior

Myriad V IP65 White Bezel

MYRIAD IP65 3000K DALI WHITE
2049537

E-number SE	7462015
Warranty	5 years

Optical data

Fixture luminous flux (lm)	1069
Luminaire efficacy (lm/W)	107
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Adjustable chromaticity	N
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	10
Primary Supply/Product voltage - min (V)	220
Electrical protection	Class II
Control gear type	Electronic ballast
Control gear mounting	Integral
Drive current (mA)	250
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz

Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	100000
Lifespan L90 B10	68500

Physical data


IP rating	IP65/20
IK rating	IK02
Diffuser material	Glass
Nominal Product Diameter (mm)	76
Weight (kg)	0.39
Recessed Depth (mm)	72

Packaging

Single packaging type	Carton
Product EAN number	5025768495375
Packaging single width (cm)	15.0
Packaging single depth (cm)	17.5
Packaging outer length / height (cm)	17.5

PHOTOMETRY

Myriad V IP65 White Bezel MYRIAD IP65 3000K DALI WHITE 2049537

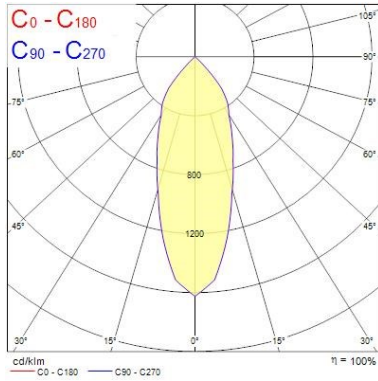

0.5	0.33	E(0°) E(C0)	15.5°	6945 2976
1.0	0.67	E(0°) E(C0)	15.5°	1737 744
1.5	1.00	E(0°) E(C0)	15.5°	772 331
2.0	1.34	E(0°) E(C0)	15.5°	434 186
2.5	1.67	E(0°) E(C0)	15.5°	278 119
3.0	2.01	E(0°) E(C0)	15.5°	195 85

Distance [m] Cone diameter [m] Illuminance [lx]
C0 - C180 (Half beam angle: 37.0°)

TECHNICAL DRAWINGS

