
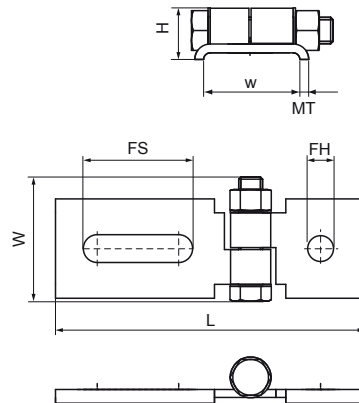


Walraven RapidStrut® Connector, Hinged (BUP1000)

(H2840)

for flexible angle connections



Features & benefits

- to make fabrication with Walraven RapidStrut® Rail
- fully adjustable
- material: steel 1.0332
- product is part of the Walraven Walraven UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227

Productnumber	For Rail Type	Model	Width	Material Thickness	Maximum Allowed Load Faz
Reference Letter			w	MT	F _{0,z}
Unit description			mm	mm	N
66581822	41x21, 41x41, 41x51, 41x62, 41x82	Support angle	42	4.00	1,000
66581823	41x21, 41x41, 41x51, 41x62, 41x82	Support angle	42	4.00	1,000