


## Myriad V IP65 White Bezel

MYRIAD IP65 4000K DALI WHITE  
2049541

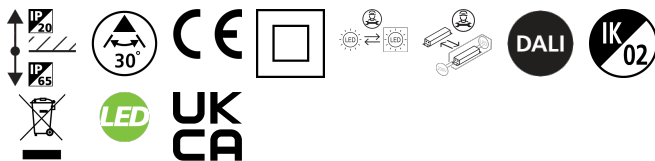

### PRODUCT OVERVIEW

|                                 |                              |
|---------------------------------|------------------------------|
| Product name                    | MYRIAD IP65 4000K DALI WHITE |
| Technology                      | LED                          |
| Cap/Base                        | N/A                          |
| Mount                           | Ceiling recessed mounting    |
| Environment                     | Interior                     |
| E-number SE                     | 7462016                      |
| Warranty                        | 5 years                      |
| Fixture luminous flux (lm)      | 1050                         |
| Luminaire efficacy (lm/W)       | 105                          |
| LOR (%)                         | 100                          |
| Colour temperature (K)          | 4000                         |
| Light colour                    | Neutral White                |
| CRI (Ra)                        | 90                           |
| Colour Variation Initial (SDCM) | SDCM3                        |
| Photobiological Risk Group      | RG1                          |
| Total power consumption (W)     | 10                           |
| Electrical protection           | Class II                     |
| Control gear type               | Electronic ballast           |
| Control gear mounting           | Integral                     |
| IP rating                       | IP65/20                      |
| IK rating                       | IK02                         |
| Product EAN number              | 5025768495412                |

### DATA TABLE

#### General data

|              |                              |
|--------------|------------------------------|
| Product name | MYRIAD IP65 4000K DALI WHITE |
| Technology   | LED                          |
| Cap/Base     | N/A                          |
| Mount        | Ceiling recessed mounting    |
| Environment  | Interior                     |

## Myriad V IP65 White Bezel

MYRIAD IP65 4000K DALI WHITE  
2049541

|             |         |
|-------------|---------|
| E-number SE | 7462016 |
| Warranty    | 5 years |

### Optical data

|                                 |               |
|---------------------------------|---------------|
| Fixture luminous flux (lm)      | 1050          |
| Luminaire efficacy (lm/W)       | 105           |
| LOR (%)                         | 100           |
| Colour temperature (K)          | 4000          |
| Light colour                    | Neutral White |
| CRI (Ra)                        | 90            |
| Colour Variation Initial (SDCM) | SDCM3         |
| Adjustable chromaticity         | N             |
| Photobiological Risk Group      | RG1           |

### Electrical data

|  |                    |
|--|--------------------|
| Total power consumption (W)                              | 10                 |
| Primary Supply/Product voltage - min (V)                 | 220                |
| Electrical protection                                    | Class II           |
| Control gear type  | Electronic ballast |
| Control gear mounting                                    | Integral           |
| Drive current (mA)                                       | 250                |
| Energy Efficiency Class (A->G) of contained light source | E                  |
| Nominal Frequency (Hz)                                   | 50/60Hz            |

### Lifetime data

|                  |        |
|------------------|--------|
| Lifespan L70 B50 | 100000 |
| Lifespan L80 B20 | 100000 |
| Lifespan L90 B10 | 68500  |

### Physical data


|                               |         |
|-------------------------------|---------|
| IP rating                     | IP65/20 |
| IK rating                     | IK02    |
| Diffuser material             | Glass   |
| Nominal Product Diameter (mm) | 76      |
| Weight (kg)                   | 0.39    |
| Recessed Depth (mm)           | 72      |

### Packaging

|                                      |               |
|--------------------------------------|---------------|
| Single packaging type                | Carton        |
| Product EAN number                   | 5025768495412 |
| Packaging single width (cm)          | 15.0          |
| Packaging single depth (cm)          | 17.5          |
| Packaging outer length / height (cm) | 17.5          |

## PHOTOMETRY

## Myriad V IP65 White Bezel MYRIAD IP65 4000K DALI WHITE 2049541

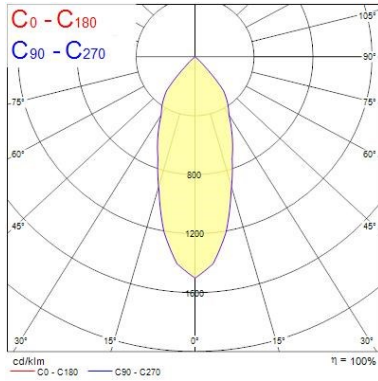

|     |      |                |       |              |
|-----|------|----------------|-------|--------------|
| 0.5 | 0.36 | E(0°)<br>E(C0) | 19.8° | 6308<br>2542 |
| 1.0 | 0.71 | E(0°)<br>E(C0) | 19.8° | 1577<br>551  |
| 1.5 | 1.07 | E(0°)<br>E(C0) | 19.8° | 731<br>254   |
| 2.0 | 1.42 | E(0°)<br>E(C0) | 19.8° | 394<br>135   |
| 2.5 | 1.78 | E(0°)<br>E(C0) | 19.8° | 252<br>106   |
| 3.0 | 2.14 | E(0°)<br>E(C0) | 19.8° | 175<br>73    |

Distance [m]      Cone diameter [m]      Illuminance [lx]  
C0 - C180 (Half beam angle: 39.2°)

### TECHNICAL DRAWINGS

