


Color: ■ gray

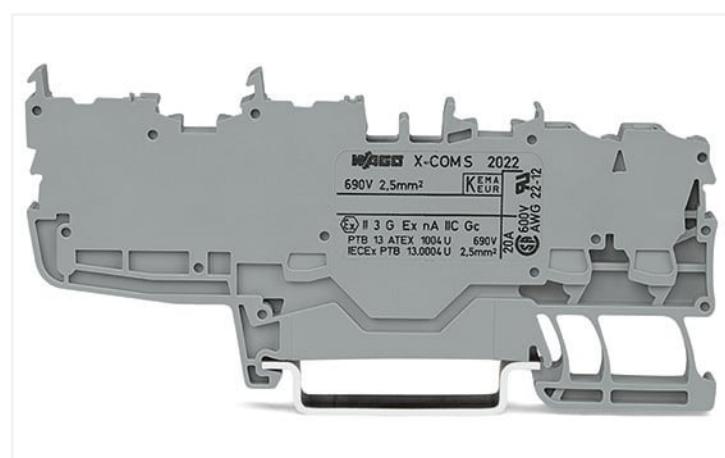

Electrical data

Ratings per			IEC/EN 60947-7-1		
Overvoltage category	III	III	II		
Pollution degree	3	2	2		
Nominal voltage	-	-	-		
Rated surge voltage	-	-	-		
Rated current	-	-	-		

Approvals per			UL 1059		
Use group	B	C	D		
Rated voltage	600 V	600 V	-		
Rated current	20 A	20 A	-		

Approvals per			CSA 22.2 No 158		
Use group	B	C	D		
Rated voltage	-	600 V	-		
Rated current	-	20 A	-		

Ex information		
Rated voltage EN (Ex e II)	630 V	

Power Loss		
Power loss, per pole (potential)	0.532 W	
Rated current I_N for specified power loss	20 A	
Resistance value for specified, current-dependent power loss	0.00133 Ω	

Connection data

Connection points	2
Female plug slots	2
Total number of potentials	1
Number of levels	1

Connection 1

Connection technology	Push-in CAGE CLAMP®
Actuation type	Operating tool
Connectable conductor materials	Copper
Nominal cross-section	2.5 mm ²
Solid conductor	0.25 ... 4 mm ² / 22 ... 12 AWG
Solid conductor; push-in termination	0.75 ... 4 mm ² / 18 ... 12 AWG
Fine-stranded conductor	0.25 ... 4 mm ² / 22 ... 12 AWG
Fine-stranded conductor; with insulated ferrule	0.25 ... 2.5 mm ² / 22 ... 14 AWG
Fine-stranded conductor; with ferrule; push-in termination	1 ... 2.5 mm ² / 18 ... 14 AWG
Note (conductor cross-section)	Depending on the conductor characteristic, a conductor with a smaller cross-section can also be inserted via push-in termination.
Strip length	10 ... 12 mm / 0.39 ... 0.47 inches
Wiring direction	Front-entry wiring

Physical data

Width	5.2 mm / 0.205 inches
Height	86.2 mm / 3.394 inches
Depth from upper-edge of DIN-rail	36.4 mm / 1.433 inches

Mechanical data

Mounting type	DIN-35 rail
Marking level	Center/side marking

Material data

Note (material data)	Information on material specifications can be found here
Color	gray
Material group	I
Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.181 MJ
Weight	9 g

Environmental requirements

Processing temperature	-35 ... +85 °C
Continuous operating temperature	-60 ... +105 °C

Commercial data

eCl@ss 10.0	27-14-11-20
eCl@ss 9.0	27-14-11-20
ETIM 8.0	EC000897
ETIM 7.0	EC000897
PU (SPU)	50 pcs
Packaging type	Box
Country of origin	CN
GTIN	4050821644798
Customs tariff number	85366990990

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Approvals / Certificates**General approvals**

Approval	Standard	Certificate Name
CCA DEKRA Certification B.V.	EN 60947	NTR CCA NL-7864
CSA DEKRA Certification B.V.	C22.2 No. 158	2437422
KEMA/KEUR DEKRA Certification B.V.	EN 60947	71-116567
UL Underwriters Laboratories Inc.	UL 1059	E45172

Declarations of conformity and manufacturer's declarations

Approval	Standard	Certificate Name
EU-Declaration of Conformity WAGO GmbH & Co. KG	-	-
UK-Declaration of Conformity WAGO GmbH & Co. KG	-	-

Approvals for hazardous areas

Approval	Standard	Certificate Name
ATEX Physikalisch Technische Bundesanstalt	EN IEC 60079-0	PTB 13 ATEX 1004 U (II3 G Ex ec II C Gc)
CCC CNEX	GB/T 3836.3	2020312313000255 (Ex ec IIC Gc)
EAC Brjansker Zertifizierungsstelle	TP TC 012/2011	RU C-DE.AM02. B.00127/19 (Ex nA IIC Gc U)
IECEx Physikalisch Technische Bundesanstalt	IEC 60079-0	IECEx PTB 13.0004U (Ex ec IIC Gc)

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product
Compliance
2022-1401/999-953



Documentation

Additional Information

Technical Section

pdf
2240.62 KB



Bid Text

2022-1401/999-953

17.05.2019

xml
4.23 KB



2022-1401/999-953

14.05.2019

docx
15.44 KB



CAD/CAE-Data

CAD data

2D/3D Models
2022-1401/999-953



CAE data

EPLAN Data Portal
2022-1401/999-953



WSCAD Universe
2022-1401/999-953



ZUKEN Portal
2022-1401/999-953



1 Compatible Products

1.1 System counterpart

1.1.1 Female connector/socket



[Item No.: 2022-102/999-953](#)

1-conductor female connector; Push-in
CAGE CLAMP®; 4 mm²; Pin spacing 5.2
mm; 2-pole; Centered locking levers; 4,00
mm²; gray

1.2 Required Accessories

1.2.1 End plate

1.2.1.1 End plate



[Item No.: 2022-1491](#)

End and intermediate plate; 1 mm thick;
gray

[Item No.: 2022-1492](#)

End and intermediate plate; 1 mm thick;
orange

1.3 Optional Accessories

1.3.1 Coding

1.3.1.1 Coding



Item No.: 2022-100

Carrier with 6 coding pins; for coding of female plugs; orange

1.3.2 DIN-rail

1.3.2.1 Mounting accessories



Item No.: 210-196

Aluminum carrier rail; 35 x 8.2 mm; 1.6 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored

Item No.: 210-198

Copper carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; copper-colored

Item No.: 210-197

Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; similar to EN 60715; silver-colored

Item No.: 210-114

Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored



Item No.: 210-118

Steel carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored

Item No.: 210-115

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 18 mm; silver-colored

Item No.: 210-112

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 25 mm; silver-colored

Item No.: 210-113

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored

1.3.3 Ferrule

1.3.3.1 Ferrule



Item No.: 216-241

Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; white

Item No.: 216-242

Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray

Item No.: 216-262

Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray

Item No.: 216-243

Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red

Item No.: 216-263

Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red

Item No.: 216-244

Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black

Item No.: 216-264

Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black

Item No.: 216-284

Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black

Item No.: 216-246

Ferrule; Sleeve for 2.5 mm² / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; blue

Item No.: 216-266

Ferrule; Sleeve for 2.5 mm² / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; blue

Item No.: 216-286

Ferrule; Sleeve for 2.5 mm² / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; blue

1.3.4 Insulation stop

1.3.4.1 Insulation stop

[Item No.: 2002-171](#)Insulation stop; 0.25 - 0.5 mm²; 5 pieces/strip; light gray[Item No.: 2002-172](#)Insulation stop; 0.75 - 1 mm²; 5 pieces/strip; dark gray

1.3.5 Jumper

1.3.5.1 Jumper

[Item No.: 2002-400](#)

Continuous jumper; 2-way; insulated; light gray

[Item No.: 2002-423/000-006](#)

Continuous jumper; from 1 to 3; insulated; blue

[Item No.: 2002-423](#)

Continuous jumper; from 1 to 3; insulated; light gray

[Item No.: 2002-423/000-005](#)

Continuous jumper; from 1 to 3; insulated; red

[Item No.: 2002-424/000-006](#)

Continuous jumper; from 1 to 4; insulated; blue

[Item No.: 2002-424](#)

Continuous jumper; from 1 to 4; insulated; light gray

[Item No.: 2002-424/000-005](#)

Continuous jumper; from 1 to 4; insulated; red

[Item No.: 2002-406/020-000](#)

Delta jumper; insulated; light gray

[Item No.: 2002-410/000-006](#)

Jumper; 10-way; insulated; blue

[Item No.: 2002-410](#)

Jumper; 10-way; insulated; light gray

[Item No.: 2002-410/000-005](#)

Jumper; 10-way; insulated; red

[Item No.: 2002-402/000-006](#)

Jumper; 2-way; insulated; blue

[Item No.: 2002-402](#)

Jumper; 2-way; insulated; light gray

[Item No.: 2002-402/000-005](#)

Jumper; 2-way; insulated; red

[Item No.: 2002-403/000-006](#)

Jumper; 3-way; insulated; blue

[Item No.: 2002-403](#)

Jumper; 3-way; insulated; light gray

[Item No.: 2002-403/000-005](#)

Jumper; 3-way; insulated; red

[Item No.: 2002-404/000-006](#)

Jumper; 4-way; insulated; blue

[Item No.: 2002-404](#)

Jumper; 4-way; insulated; light gray

[Item No.: 2002-404/000-005](#)

Jumper; 4-way; insulated; red

[Item No.: 2002-405/000-006](#)

Jumper; 5-way; insulated; blue

[Item No.: 2002-405](#)

Jumper; 5-way; insulated; light gray

[Item No.: 2002-405/000-005](#)

Jumper; 5-way; insulated; red

[Item No.: 2002-406/000-006](#)

Jumper; 6-way; insulated; blue

[Item No.: 2002-406](#)

Jumper; 6-way; insulated; light gray

[Item No.: 2002-406/000-005](#)

Jumper; 6-way; insulated; red

[Item No.: 2002-407/000-006](#)

Jumper; 7-way; insulated; blue

[Item No.: 2002-407](#)

Jumper; 7-way; insulated; light gray

[Item No.: 2002-407/000-005](#)

Jumper; 7-way; insulated; red

[Item No.: 2002-408/000-006](#)

Jumper; 8-way; insulated; blue

[Item No.: 2002-408](#)

Jumper; 8-way; insulated; light gray

[Item No.: 2002-408/000-005](#)

Jumper; 8-way; insulated; red

[Item No.: 2002-409/000-006](#)

Jumper; 9-way; insulated; blue

[Item No.: 2002-409](#)

Jumper; 9-way; insulated; light gray

[Item No.: 2002-409/000-005](#)

Jumper; 9-way; insulated; red

[Item No.: 2002-440](#)

Jumper; from 1 to 10; insulated; light gray

[Item No.: 2002-433](#)

Jumper; from 1 to 3; insulated; light gray

[Item No.: 2002-434](#)

Jumper; from 1 to 4; insulated; light gray

[Item No.: 2002-435](#)

Jumper; from 1 to 5; insulated; light gray

[Item No.: 2002-436](#)

Jumper; from 1 to 6; insulated; light gray

[Item No.: 2002-437](#)

Jumper; from 1 to 7; insulated; light gray

[Item No.: 2002-438](#)

Jumper; from 1 to 8; insulated; light gray

[Item No.: 2002-439](#)

Jumper; from 1 to 9; insulated; light gray

[Item No.: 2002-480](#)

Staggered jumper; 10-way; insulated; light gray

1.3.5.1 Jumper



Item No.: 2002-481
Staggered jumper; 11-way; insulated; light gray



Item No.: 2002-482
Staggered jumper; 12-way; insulated; light gray



Item No.: 2002-473/011-000
Staggered jumper; 2-way; from 1 to 3; insulated; light gray



Item No.: 2002-472
Staggered jumper; 2-way; insulated; light gray



Item No.: 2002-473
Staggered jumper; 3-way; insulated; light gray



Item No.: 2002-475/011-000
Staggered jumper; 3-way; insulated; light gray



Item No.: 2002-474
Staggered jumper; 4-way; insulated; light gray



Item No.: 2002-475
Staggered jumper; 5-way; insulated; light gray



Item No.: 2002-476
Staggered jumper; 6-way; insulated; light gray



Item No.: 2002-477
Staggered jumper; 7-way; insulated; light gray




Item No.: 2002-478
Staggered jumper; 8-way; insulated; light gray



Item No.: 2002-479
Staggered jumper; 9-way; insulated; light gray



Item No.: 2002-477/011-000
Staggered jumper; insulated; light gray



Item No.: 2002-479/011-000
Staggered jumper; insulated; light gray



Item No.: 2002-481/011-000
Staggered jumper; insulated; light gray



Item No.: 2002-405/011-000
Star point jumper; 3-way; insulated; light gray



Item No.: 210-103
Wire commoning chain; insulated; black

Item No.: 210-123
Wire commoning chain; insulated; blue

1.3.6 Marking

1.3.6.1 Group marker carrier



Item No.: 2009-191
Group marker carrier; gray



Item No.: 2009-192
Group marker carrier; gray



Item No.: 2009-193
Group marker carrier; gray

1.3.6.2 Marker



Item No.: 2009-145
Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white



Item No.: 248-501
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white



Item No.: 793-5501
WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; white



Item No.: 2009-115
WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white

1.3.6.3 Marker carrier



Item No.: 2002-161
Adaptor; gray



Item No.: 2009-198
Adaptor; gray

1.3.6.4 Marking strip



Item No.: 2009-110
Marking strips; for Smart Printer; on reel; not stretchable; plain; snap-on type; white

1.3.7 Protective warning marker

1.3.7.1 Cover



Item No.: 2002-115

Protective warning marker; for 5 terminal blocks; with high-voltage symbol, black; yellow

1.3.8 Push-in type wire jumper

1.3.8.1 Jumper



Item No.: 2009-414

Push-in type wire jumper; 1.5 mm²; insulated; 110 mm long; black



Item No.: 2009-414/000-005

Push-in type wire jumper; 1.5 mm²; insulated; 110 mm long; black



Item No.: 2009-416

Push-in type wire jumper; 1.5 mm²; insulated; 250 mm long; black



Item No.: 2009-414/000-006

Push-in type wire jumper; insulated; 110 mm long; black



Item No.: 2009-412

Push-in type wire jumper; insulated; 60 mm long; black

1.3.9 Screwless end stop

1.3.9.1 Mounting accessories



Item No.: 249-117

Screwless end stop; 10 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray

Item No.: 249-116

Screwless end stop; 6 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray

1.3.10 Test and measurement

1.3.10.1 Testing accessories



Item No.: 2002-560

Modular TOPJOB S connector; modular; for jumper contact slot; 10-pole; 2,50 mm²; gray

Item No.: 2002-511

Modular TOPJOB S connector; modular; for jumper contact slot; 1-pole; 2,50 mm²; gray

Item No.: 2002-552

Modular TOPJOB S connector; modular; for jumper contact slot; 2-pole; 2,50 mm²; gray

Item No.: 2002-553

Modular TOPJOB S connector; modular; for jumper contact slot; 3-pole; 2,50 mm²; gray

Item No.: 2002-554

Modular TOPJOB S connector; modular; for jumper contact slot; 4-pole; 2,50 mm²; gray

Item No.: 2002-555

Modular TOPJOB S connector; modular; for jumper contact slot; 5-pole; 2,50 mm²; gray

Item No.: 2002-556

Modular TOPJOB S connector; modular; for jumper contact slot; 6-pole; 2,50 mm²; gray

Item No.: 2002-557

Modular TOPJOB S connector; modular; for jumper contact slot; 7-pole; 2,50 mm²; gray

Item No.: 2002-558

Modular TOPJOB S connector; modular; for jumper contact slot; 8-pole; 2,50 mm²; gray

Item No.: 2002-559

Modular TOPJOB S connector; modular; for jumper contact slot; 9-pole; 2,50 mm²; gray

Item No.: 2002-549

Spacer module; modular; e.g., for bridging commoned terminal blocks; gray

Item No.: 2009-174

Test plug adapter; for 4 mm Ø test plugs; for testing TOPJOB S rail-mounted terminal blocks; gray

Item No.: 2009-182

Testing tap; for max. 2.5 mm²; tool-free connection for individual test wires 0.08 - 2.5 mm; gray

Item No.: 859-500

WAGO Test pin; 1 mm Ø; 30 V AC / 60 V DC; CAT0; 1 A; 10 mm uninsulated; Test lead for soldering up to 0,5mm²

1.3.11 Tool

1.3.11.1 Operating tool




Item No.: 210-720

Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured

Installation Notes


Installation



Snap individual carrier terminal blocks onto the DIN-rail and slide together.



Open the assembly by laterally sliding a block via operating tool (3.5 x 0.5 mm blade).




Separate terminal block assembly and slide individual terminal blocks laterally using an operating tool.

Conductor termination




Push-in CAGE CLAMP® enables solid conductors to be connected by simply pushing them into the unit.

Commoning



Commoning X-COM®S-SYSTEM Terminal Blocks using jumpers for TOPJOB® S Terminal Blocks. An end plate provides connection to TOPJOB® S Terminal Blocks. 2020 and 2022 Series Terminal Blocks are combinable. Jumper slots are on the same level for both series.




Pairing push-in comb style jumpers.




Commoning with push-in type wire jumper.

Testing



Test plug adapter (2009-174) for 4 mm test plugs or banana plugs – also suitable for X-COM®S-SYSTEM-MINI Terminal Blocks.


Coding



Insert coding pin into the corresponding slot and twist it off.



Coding a female plug: remove coding finger using a suitable tool.




Insert a coding pin (2022-100) into the corresponding location of the carrier terminal block.

Ex application




630 V = rated voltage for use in Zone 2 hazardous areas, "ec" type of protection
Ex marking:
"Ex" sign and extended item number ".../999-953" are printed on the side of both carrier terminal blocks and female plugs with Ex approval.
Shorter locking lever (factory-mounted) makes accidental disconnection more difficult.

Marking




Clear marking via large marking area



Group marking with height-adjustable group marker carrier (2009-163)

Security



Carrier terminal blocks and female plugs are touch-proof.