

# Concord

## BEACON XL 93CRI 3K MEDIUM BEAM L3 ON-BOARD DIM WHITE 2059685



### Features

- Integrated LED spotlight, white RAL 9016, compact and minimalist design, ideal for retail, display, museum and gallery applications, die-cast aluminium body, passive cooling heatsink, beam angle: 34° medium beam, optics: Polycarbonate lens, colour temperature: 3000K warm white, total system power: 33W, total fixture output: 3060lm, luminaire efficacy: 93lm/W, LOR: 100%, colour rendering: Ra 93 typical, LED Chromacity: 3 step MacAdam ellipse, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: 850mA, electronic driver, dimmable via on-board potentiometer, power factor: 0.9 electrical protection: CLASS II, 3-circuit track adaptor, suitable for Concord Lytespan 3 track, ingress protection rating: IP20, suitable for internal environment only, horizontal rotation: 355°, vertical tilt: 90°, dimensions: Ø113x165x205mm, weight: 1.66kg.

### Product Overview


<b>Product name</b>	BEACON XL 93CRI 3K MEDIUM BEAM L3 ON-BOARD DIM WHITE
<b>Technology</b>	LED
<b>Cap/Base</b>	N/A
<b>Housing</b>	Aluminium
<b>Mount</b>	Track mounting
<b>Environment</b>	Internal
<b>E-number FI</b>	4280845
<b>Fixture luminous flux (lm)</b>	3060
<b>Luminaire efficacy (lm/W)</b>	93
<b>LOR (%)</b>	100
<b>Colour temperature (K)</b>	3000
<b>Light colour</b>	Warm White
<b>CRI (Ra)</b>	93
<b>Colour Consistency (SDCM)</b>	3

# Concord

## BEACON XL 93CRI 3K MEDIUM BEAM L3 ON-BOARD DIM WHITE 2059685

Photobiological Risk Group	RG1
Total power consumption (W)	33
Electrical protection	Class II
Control gear type	Electronic ballast
Housing colour	White
IP rating	IP20
IK rating	IK02
Product EAN number	5025768596850
Warranty	5 years

### Photometry

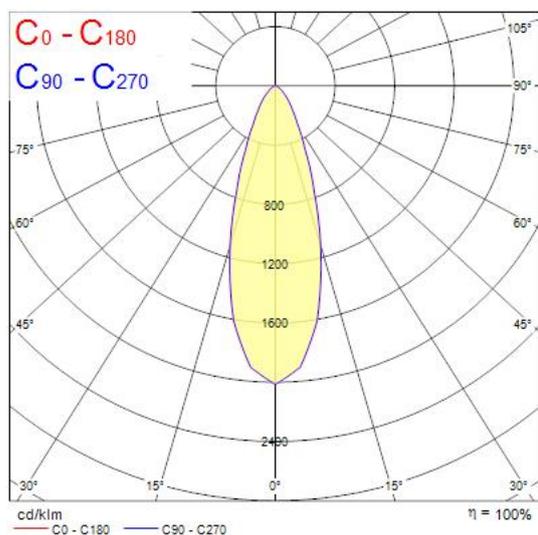

### Technical drawings

