


Walraven Bifix® G2 with Lining (M10) (BUP1000)

(A0572)

for steel, copper, cast iron and plastic (multilayer) pipe

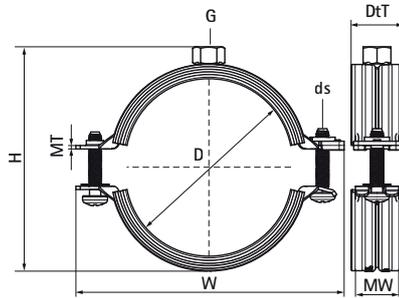

Features & benefits

- two-screw clamp
- quick closing mechanism for easy locking of the clamp with one hand
- 2 component rubber lining provides easy positioning of the pipe during installation
- when the clamp is closed, the pipe rests on soft black rubber lining for increased noise reduction
- material: steel
- product is part of the Walraven BIS UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227
- temperature resistance from -30 °C to +120 °C
- sound insulating lining according DIN 4109
- noise reduction according to ISO 3822-1 up to 23 dB(A)



Product Number	VVS Number	DN	Pipe Diameter Imperial	Connection Thread	Total Height	Total Width	Total Depth	Material Width	Material Thickness	Screw Size	Maximum Allowed Load Faz	Approvals
Reference letter		D	D	G	H	W	DtT	MW	MT	ds	Fa,z	
Unit description			"		mm	mm	mm	mm	mm		N	
31285014	018034214	DN 8	1/4	M10	34	59	24	20	1.25	M6	800	RAL-GZ 655/B, ITB (KOT), ISO 3822-1, EPD
31285019	018034219	DN 10	3/8	M10	38	63	24	20	1.25	M6	800	RAL-GZ 655/B, ITB (KOT), ISO 3822-1, EPD
31285023	018034223	DN 15	1/2	M10	43	68	24	20	1.25	M6	800	RAL-GZ 655/B, ITB (KOT), ISO 3822-1, EPD
31285028	018034228	DN 20	3/4	M10	49	74	24	20	1.25	M6	800	RAL-GZ 655/B, ITB (KOT), ISO 3822-1, EPD
31285035	018034235	DN 25	1	M10	59	80	24	20	1.25	M6	800	RAL-GZ 655/B, ITB (KOT), ISO 3822-1, EPD
31285039	018034239	-	-	M10	63	84	24	20	1.25	M6	800	RAL-GZ 655/B, ITB (KOT), ISO 3822-1, EPD
31285045	018034245	DN 32	1 1/4	M10	68	91	24	20	1.25	M6	800	RAL-GZ 655/B, ITB (KOT), ISO 3822-1, EPD
31285052	018034252	DN 40	1 1/2	M10	76	97	24	20	1.25	M6	800	RAL-GZ 655/B, ITB (KOT), ISO 3822-1, EPD
31285058	018034258	-	-	M10	86	104	24	20	1.25	M6	800	RAL-GZ 655/B, ITB (KOT), ISO 3822-1, EPD
31285064	018034264	DN 50	2	M10	93	109	24	20	1.25	M6	800	RAL-GZ 655/B, ITB (KOT), ISO 3822-1, EPD
31285070	018034270	-	-	M10	99	118	24	20	1.50	M6	1,000	RAL-GZ 655/B, ITB (KOT), ISO 3822-1, EPD
31285079	018034279	DN 65	2 1/2	M10	105	125	24	20	1.50	M6	1,000	RAL-GZ 655/B, ITB (KOT), ISO 3822-1, EPD
31285083	018034283	-	-	M10	112	132	24	20	1.50	M6	1,000	RAL-GZ 655/B, ITB (KOT), ISO 3822-1, EPD
31285091	018034291	DN 80	3	M10	124	142	27	23	2.00	M6	1,800	RAL-GZ 655/B, ITB (KOT), ISO 3822-1, EPD
31285097		-	-	M10	128	148	27	23	2.00	M6	1,800	RAL-GZ 655/B, ITB (KOT), ISO 3822-1, EPD
31285105	018034305	-	-	M10	135	155	27	23	2.00	M6	1,800	RAL-GZ 655/B, ITB (KOT), ISO 3822-1, EPD
31285115	018034315	DN 100	4	M10	147	164	27	23	2.00	M6	1,800	RAL-GZ 655/B, ITB (KOT), ISO 3822-1, EPD
31285130	018034330	-	-	M10	164	181	27	23	2.00	M6	1,800	RAL-GZ 655/B, ITB (KOT), ISO 3822-1, EPD
31285140	018034340	DN 125	5	M10	174	191	27	23	2.00	M6	1,800	RAL-GZ 655/B, ITB (KOT), ISO 3822-1, EPD
31285160	018034360	-	-	M10	193	211	27	23	2.00	M6	1,800	RAL-GZ 655/B, ITB (KOT), ISO 3822-1, EPD

Walraven Bifix® G2 with Lining (M10) (BUP1000)

(A0572)

for steel, copper, cast iron and plastic (multilayer) pipe

Product Number	VVS Number	DN	Pipe Diameter Imperial	Connection Thread	Total Height	Total Width	Total Depth	Material Width	Material Thickness	Screw Size	Maximum Allowed Load Faz	Approvals
<i>Reference letter</i>		<i>D</i>	<i>D</i>	<i>G</i>	<i>H</i>	<i>W</i>	<i>DtT</i>	<i>MW</i>	<i>MT</i>	<i>ds</i>	<i>Fa,z</i>	
<i>Unit description</i>			"		mm	mm	mm	mm	mm		N	
31285169	018034369	DN 150	6	M10	203	225	29	25	2.50	M8	2,500	RAL-GZ 655/B, ITB (KOT), ISO 3822-1, EPD
31285180	018034380	-	-	M10	215	238	29	25	2.50	M8	2,500	RAL-GZ 655/B, ITB (KOT), ISO 3822-1, EPD
31285200	018034400	-	-	M10	233	257	29	25	2.50	M8	2,500	RAL-GZ 655/B, ITB (KOT), ISO 3822-1, EPD
31285210	018034410	-	-	M10	247	269	29	25	2.50	M8	2,500	RAL-GZ 655/B, ITB (KOT), ISO 3822-1, EPD
31285225	018034425	DN 200	8	M10	260	283	29	25	2.50	M8	2,500	RAL-GZ 655/B, ITB (KOT), ISO 3822-1, EPD