

# Optix Recessed 600x600 Standard Output

OPTIX RECESSED 600x600 2L SO 4000K ALU EM  
2023597



## Product features

- OPTIX RECESSED 600x600 2L SO 4000K ALU EM is a high efficacy low glare luminaire for office and education applications. Ceiling recessed 600x600 mm. Aluminised plastic extra low glare optics in 2 lines configuration. White RAL9016 fixture body. Constant current driver. 3hr combined maintained emergency version. 4000K Neutral White LED, CRI>80, chromaticity tolerance of 3-step MacAdam ellipse. Luminous flux 2800lm. Power consumption 21W. Luminaire efficacy 133lm/W. Lifespan: 48,500 hours L90B10. UGR<16, Luminance at 65°<200 Cd/m<sup>2</sup>, IK07, IP20. Photobiological safety risk group 0. Electrical protection Class I. Glow wire test 850°C.



## PRODUCT OVERVIEW


Product name	OPTIX RECESSED 600x600 2L SO 4000K ALU EM
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
Fixture rating	Enclosed
General application	Education, Office
ETIM Class	EC002892
Warranty	5 years
Useful luminous flux (Fuse)	2900
Fixture luminous flux (lm)	2900
Luminous flux (lm)	2900
Luminaire efficacy (lm/W)	133
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Glare control	< 16
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	80
Total power consumption (W)	21
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Product EAN number	5025768235971

## Optix Recessed 600x600 Standard Output

*OPTIX RECESSED 600x600 2L SO 4000K ALU EM*

2023597

### PHOTOMETRY

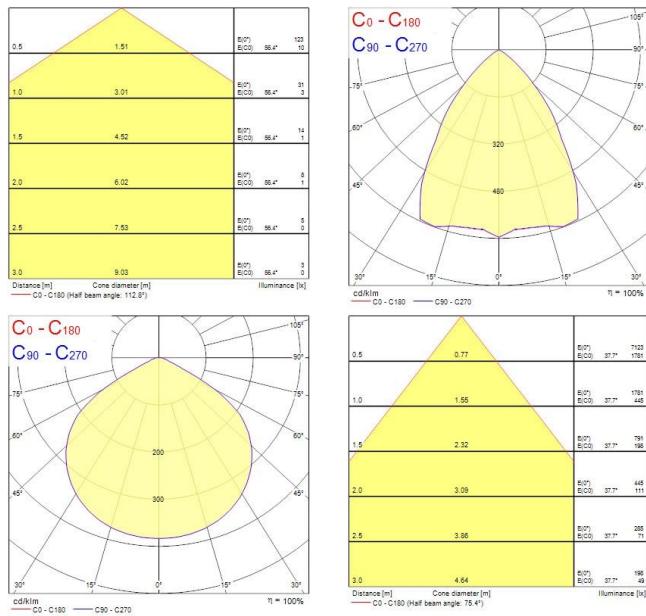

### TECHNICAL DRAWINGS

