


Walraven Bifix® G2 with Lining (M10) (BUP1000)

(A0572)

for steel, copper, cast iron and plastic (multilayer) pipe

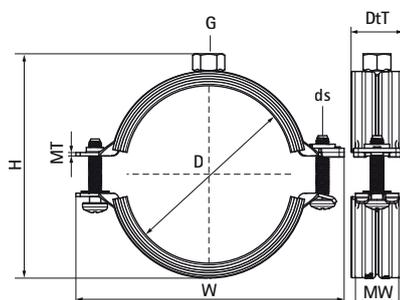

Features & benefits

- two-screw clamp
- quick closing mechanism for easy locking of the clamp with one hand
- 2 component rubber lining provides easy positioning of the pipe during installation
- when the clamp is closed, the pipe rests on soft black rubber lining for increased noise reduction
- material: steel
- product is part of the Walraven BIS UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227
- temperature resistance from -30 °C to +120 °C
- sound insulating lining according DIN 4109
- noise reduction according to ISO 3822-1 up to 23 dB(A)



| Product Number | DN | Pipe Diameter Imperial | Connection Thread | Total Height | Total Width | Total Depth | Material Width | Material Thickness | Screw Size | Maximum Allowed Load Faz | Approvals |
|------------------|--------|------------------------|-------------------|--------------|-------------|-------------|----------------|--------------------|------------|--------------------------|--|
| Reference letter | D | D | G | H | W | DdT | MW | MT | ds | Fa,z | |
| Unit description | " | | | mm | mm | mm | mm | mm | | N | |
| 31285014 | DN 8 | 1/4 | M10 | 34 | 59 | 24 | 20 | 1.25 | M6 | 800 | RAL-GZ 655/B, ITB (KOT), ISO 3822-1, EPD |
| 31285019 | DN 10 | 3/8 | M10 | 38 | 63 | 24 | 20 | 1.25 | M6 | 800 | RAL-GZ 655/B, ITB (KOT), ISO 3822-1, EPD |
| 31285023 | DN 15 | 1/2 | M10 | 43 | 68 | 24 | 20 | 1.25 | M6 | 800 | RAL-GZ 655/B, ITB (KOT), ISO 3822-1, EPD |
| 31285028 | DN 20 | 3/4 | M10 | 49 | 74 | 24 | 20 | 1.25 | M6 | 800 | RAL-GZ 655/B, ITB (KOT), ISO 3822-1, EPD |
| 31285035 | DN 25 | 1 | M10 | 59 | 80 | 24 | 20 | 1.25 | M6 | 800 | RAL-GZ 655/B, ITB (KOT), ISO 3822-1, EPD |
| 31285039 | - | - | M10 | 63 | 84 | 24 | 20 | 1.25 | M6 | 800 | RAL-GZ 655/B, ITB (KOT), ISO 3822-1, EPD |
| 31285045 | DN 32 | 1 1/4 | M10 | 68 | 91 | 24 | 20 | 1.25 | M6 | 800 | RAL-GZ 655/B, ITB (KOT), ISO 3822-1, EPD |
| 31285052 | DN 40 | 1 1/2 | M10 | 76 | 97 | 24 | 20 | 1.25 | M6 | 800 | RAL-GZ 655/B, ITB (KOT), ISO 3822-1, EPD |
| 31285058 | - | - | M10 | 86 | 104 | 24 | 20 | 1.25 | M6 | 800 | RAL-GZ 655/B, ITB (KOT), ISO 3822-1, EPD |
| 31285064 | DN 50 | 2 | M10 | 93 | 109 | 24 | 20 | 1.25 | M6 | 800 | RAL-GZ 655/B, ITB (KOT), ISO 3822-1, EPD |
| 31285070 | - | - | M10 | 99 | 118 | 24 | 20 | 1.50 | M6 | 1,000 | RAL-GZ 655/B, ITB (KOT), ISO 3822-1, EPD |
| 31285079 | DN 65 | 2 1/2 | M10 | 105 | 125 | 24 | 20 | 1.50 | M6 | 1,000 | RAL-GZ 655/B, ITB (KOT), ISO 3822-1, EPD |
| 31285083 | - | - | M10 | 112 | 132 | 24 | 20 | 1.50 | M6 | 1,000 | RAL-GZ 655/B, ITB (KOT), ISO 3822-1, EPD |
| 31285091 | DN 80 | 3 | M10 | 124 | 142 | 27 | 23 | 2.00 | M6 | 1,800 | RAL-GZ 655/B, ITB (KOT), ISO 3822-1, EPD |
| 31285105 | - | - | M10 | 135 | 155 | 27 | 23 | 2.00 | M6 | 1,800 | RAL-GZ 655/B, ITB (KOT), ISO 3822-1, EPD |
| 31285115 | DN 100 | 4 | M10 | 147 | 164 | 27 | 23 | 2.00 | M6 | 1,800 | RAL-GZ 655/B, ITB (KOT), ISO 3822-1, EPD |
| 31285130 | - | - | M10 | 164 | 181 | 27 | 23 | 2.00 | M6 | 1,800 | RAL-GZ 655/B, ITB (KOT), ISO 3822-1, EPD |
| 31285140 | DN 125 | 5 | M10 | 174 | 191 | 27 | 23 | 2.00 | M6 | 1,800 | RAL-GZ 655/B, ITB (KOT), ISO 3822-1, EPD |
| 31285160 | - | - | M10 | 193 | 211 | 27 | 23 | 2.00 | M6 | 1,800 | RAL-GZ 655/B, ITB (KOT), ISO 3822-1, EPD |
| 31285169 | DN 150 | 6 | M10 | 203 | 225 | 29 | 25 | 2.50 | M8 | 2,500 | RAL-GZ 655/B, ITB (KOT), ISO 3822-1, EPD |

Walraven Bifix® G2 with Lining (M10) (BUP1000)

(A0572)

for steel, copper, cast iron and plastic (multilayer) pipe

| Product Number | DN | Pipe Diameter Imperial | Connection Thread | Total Height | Total Width | Total Depth | Material Width | Material Thickness | Screw Size | Maximum Allowed Load Faz | Approvals |
|------------------|--------|------------------------|-------------------|--------------|-------------|-------------|----------------|--------------------|------------|--------------------------|--|
| Reference letter | D | D | G | H | W | DiT | MW | MT | ds | Fa,z | |
| Unit description | | " | | mm | mm | mm | mm | mm | | N | |
| 31285180 | - | - | M10 | 215 | 238 | 29 | 25 | 2.50 | M8 | 2,500 | RAL-GZ 655/B, ITB (KOT), ISO 3822-1, EPD |
| 31285200 | - | - | M10 | 233 | 257 | 29 | 25 | 2.50 | M8 | 2,500 | RAL-GZ 655/B, ITB (KOT), ISO 3822-1, EPD |
| 31285210 | - | - | M10 | 247 | 269 | 29 | 25 | 2.50 | M8 | 2,500 | RAL-GZ 655/B, ITB (KOT), ISO 3822-1, EPD |
| 31285225 | DN 200 | 8 | M10 | 260 | 283 | 29 | 25 | 2.50 | M8 | 2,500 | RAL-GZ 655/B, ITB (KOT), ISO 3822-1, EPD |
| 31285097 | - | - | M10 | 128 | 148 | 27 | 23 | 2.00 | M6 | 1,800 | RAL-GZ 655/B, ITB (KOT), ISO 3822-1, EPD |