


## Walraven Bifix® G2 with Lining (M8) (BUP1000)

(A0544)

for steel, copper, cast iron and plastic (multilayer) pipe

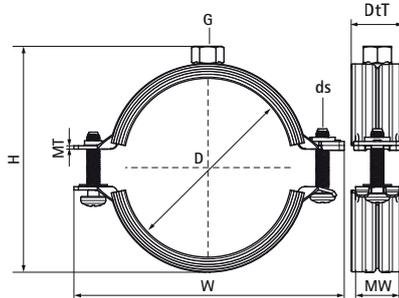

### Features & benefits

- two-screw clamp
- quick closing mechanism for easy locking of the clamp with one hand
- 2 component rubber lining provides easy positioning of the pipe during installation
- when the clamp is closed, the pipe rests on soft black rubber lining for increased noise reduction
- suitable for steel, copper, cast iron and plastic (multilayer) pipe
- material: steel
- product is part of the Walraven BIS UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227
- temperature resistance from -30 °C to +120 °C
- sound insulating lining according DIN 4109
- noise reduction according to ISO 3822-1 up to 23 dB(A)



Product Number	VVS Number	DN	Pipe Diameter Imperial	Connection Thread	Total Height	Total Width	Total Depth	Material Width	Material Thickness	Screw Size	Maximum Allowed Load Faz	Approvals
Reference letter		D	D	G	H	W	DtT	MW	MT	ds	Fa,z	
Unit description			"		mm	mm	mm	mm	mm		N	
31185014	018034014	DN 8	¼	M8	34	59	24	20	1.25	M6	700	RAL-GZ 655/B, ITB (KOT), ISO 3822-1, EPD
31185019	018034019	DN 10	¾	M8	38	63	24	20	1.25	M6	700	RAL-GZ 655/B, ITB (KOT), ISO 3822-1, EPD
31185023	018034023	DN 15	½	M8	43	68	24	20	1.25	M6	700	RAL-GZ 655/B, ITB (KOT), ISO 3822-1, EPD
31185028	018034028	DN 20	¾	M8	49	74	24	20	1.25	M6	700	RAL-GZ 655/B, ITB (KOT), ISO 3822-1, EPD
31185035	018034035	DN 25	1	M8	59	80	24	20	1.25	M6	700	RAL-GZ 655/B, ITB (KOT), ISO 3822-1, EPD
31185039	018034039	-	-	M8	63	84	24	20	1.25	M6	700	RAL-GZ 655/B, ITB (KOT), ISO 3822-1, EPD
31185045	018034045	DN 32	1¼	M8	68	91	24	20	1.25	M6	700	RAL-GZ 655/B, ITB (KOT), ISO 3822-1, EPD
31185052	018034052	DN 40	1½	M8	76	97	24	20	1.25	M6	700	RAL-GZ 655/B, ITB (KOT), ISO 3822-1, EPD
31185058	018034058	-	-	M8	86	104	24	20	1.25	M6	700	RAL-GZ 655/B, ITB (KOT), ISO 3822-1, EPD
31185064	018034064	DN 50	2	M8	93	109	24	20	1.25	M6	700	RAL-GZ 655/B, ITB (KOT), ISO 3822-1, EPD
31185070	018034070	-	-	M8	99	118	24	20	1.50	M6	800	RAL-GZ 655/B, ITB (KOT), ISO 3822-1, EPD
31185079	018034079	DN 65	2½	M8	105	125	24	20	1.50	M6	800	RAL-GZ 655/B, ITB (KOT), ISO 3822-1, EPD
31185083	018034083	-	-	M8	112	132	24	20	1.50	M6	800	RAL-GZ 655/B, ITB (KOT), ISO 3822-1, EPD