


# Walraven Pipe Clamp 4000 (M8) (BUP1000)

(B3505)

for plastic pipes

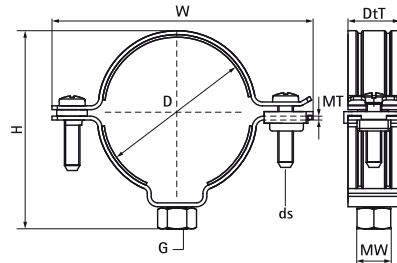

## Features & benefits

- two-screw clamp
- with quick locking system; will not open during installation
- with removable spacer washers, making the clamp suitable for either sliding or anchoring
- inside clamp diameter larger than outside pipe diameter for expansion or contraction of the pipe
- inside profile to protect pipes from damage
- material: steel 1.0332
- surface protection:
- product is part of the Walraven BIS UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227

## EPD

| Product Number   | DN     | Connection Thread | Total Height | Total Width | Total Depth | Material Width | Material Thickness | Screw Size | Maximum Allowed Load Faz | Approvals |
|------------------|--------|-------------------|--------------|-------------|-------------|----------------|--------------------|------------|--------------------------|-----------|
| Reference letter | D      | G                 | H            | W           | DtT         | MW             | MT                 | ds         | Fo,z                     |           |
| Unit description |        |                   | mm           | mm          | mm          | mm             | mm                 |            | N                        |           |
| 4448032          | DN 25  | M8                | 54           | 76          | 23          | 20             | 1.50               | M6         | 910                      | EPD       |
| 4448040          | DN 32  | M8                | 61           | 84          | 23          | 20             | 1.50               | M6         | 910                      | EPD       |
| 4448050          | DN 40  | M8                | 71           | 94          | 23          | 20             | 1.50               | M6         | 910                      | EPD       |
| 4448063          | -      | M8                | 84           | 107         | 23          | 20             | 1.50               | M6         | 910                      | EPD       |
| 4448070          | -      | M8                | 91           | 114         | 23          | 20             | 1.50               | M6         | 910                      | EPD       |
| 4448075          | DN 70  | M8                | 96           | 119         | 23          | 20             | 1.50               | M6         | 910                      | EPD       |
| 4448080          | -      | M8                | 101          | 124         | 23          | 20             | 1.50               | M6         | 910                      | EPD       |
| 4448090          | DN 80  | M8                | 111          | 134         | 23          | 20             | 1.50               | M6         | 910                      | EPD       |
| 4448100          | -      | M8                | 121          | 144         | 23          | 20             | 1.50               | M6         | 910                      | EPD       |
| 4448110          | DN 100 | M8                | 132          | 158         | 26          | 23             | 2.00               | M6         | 2,200                    | EPD       |
| 4448125          | DN 125 | M8                | 148          | 173         | 26          | 23             | 2.00               | M6         | 2,200                    | EPD       |
| 4448160          | DN 150 | M8                | 183          | 208         | 26          | 23             | 2.00               | M6         | 2,200                    | EPD       |
| 4448200          | DN 200 | M8                | 224          | 248         | 26          | 23             | 2.00               | M6         | 2,200                    | EPD       |