


Walraven BISMAT® 2000 (M8/10) 2-screw

(A0524)

for steel, copper, cast iron and plastic (multilayer) pipe

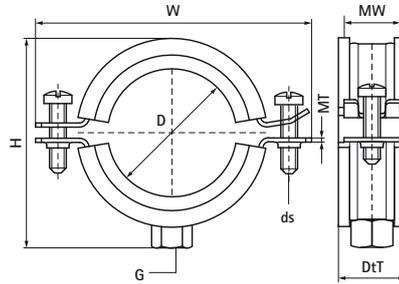

Features & benefits

- two-screw clamp
- with Walraven BISMAT® quick locking system
- material: steel
- zinc plated
- sound insulating lining according DIN 4109
- noise reduction according to ISO 3822-1 up to 23 dB(A)
- tested for fire safety



| Product Number | VVS Number | DN | Pipe Diameter Imperial | Connection Thread | Total Height | Total Width | Total Depth | Material Width | Material Thickness | Screw Size | Maximum Allowed Load Faz | Approvals |
|------------------|------------|--------|------------------------|-------------------|--------------|-------------|-------------|----------------|--------------------|------------|--------------------------|---|
| Reference letter | | D | D | G | H | W | DtT | MW | MT | ds | F _{a,z} | |
| Unit description | | | " | | mm | mm | mm | mm | mm | | N | |
| 3403064 | | DN 50 | 2 | M8/M10 | 92 | 107 | 29 | 23 | 2.00 | M6 | 520 | RAL-GZ 656, ITB (KOT), CE, ETA, ISO 3822-1, RAL-GZ 655/B, EPD |
| 3403070 | | - | - | M8/M10 | 100 | 115 | 29 | 23 | 2.00 | M6 | 520 | RAL-GZ 656, ITB (KOT), CE, ETA, ISO 3822-1, RAL-GZ 655/B, EPD |
| 3403080 | | DN 65 | 2½ | M8/M10 | 110 | 125 | 29 | 23 | 2.00 | M6 | 520 | RAL-GZ 656, ITB (KOT), CE, ETA, ISO 3822-1, RAL-GZ 655/B, EPD |
| 3403091 | | DN 80 | 3 | M8/M10 | 122 | 136 | 31 | 25 | 2.50 | M6 | 935 | RAL-GZ 656, ITB (KOT), CE, ETA, ISO 3822-1, RAL-GZ 655/B, EPD |
| 3403105 | | - | - | M8/M10 | 137 | 151 | 31 | 25 | 2.50 | M6 | 935 | RAL-GZ 656, ITB (KOT), CE, ETA, ISO 3822-1, RAL-GZ 655/B, EPD |
| 3403114 | | DN 100 | 4 | M8/M10 | 145 | 159 | 31 | 25 | 2.50 | M6 | 935 | RAL-GZ 656, ITB (KOT), CE, ETA, ISO 3822-1, RAL-GZ 655/B, EPD |
| 3403119 | 018004176 | - | - | M8/M10 | 150 | 164 | 31 | 25 | 2.50 | M6 | 935 | ITB (KOT), CE, ETA, ISO 3822-1, RAL-GZ 655/B, EPD |
| 3403125 | | - | - | M8/M10 | 158 | 172 | 31 | 25 | 2.50 | M6 | 935 | ITB (KOT), CE, ETA, ISO 3822-1, RAL-GZ 655/B, EPD |
| 3403141 | | DN 125 | 5 | M8/M10 | 172 | 187 | 31 | 25 | 2.50 | M6 | 935 | ITB (KOT), CE, ETA, ISO 3822-1, RAL-GZ 655/B, EPD |