

Features

- Ceiling / wall luminaire with integrated LED. Perfect solution for hallways, circulation spaces or foyers. Body Size diameter 400mm. Besa mounting box compatible, hole distance 51 & 78mm. DualTone functionality enables switch between 3000K and 4000K colour temperatures. With the help of DIP Switch multiple lumen outputs can be set up in 4 steps (4000K: 24W 2500lm, 28W 3000lm, 32W 3500lm, 36W 4000lm). Efficacy up to 111lm/W. Non-dimmable. Equipped with integrated self test 3 hours LiFePO4 emergency kit. Lumen output in emergency mode: 400lm (3000K) / 430lm (4000K). IK03, IP54. Low maintenance with lifespan 120,000 hours L70:B50.


Product Overview

Product name	START Surface IP54 Multipower 4000lm 830/840 EM
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting
E-number FI	4279515
Fixture luminous flux (lm)	4000
Luminaire efficacy (lm/W)	111
Light colour	Warm White or Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Photobiological Risk Group	RG1
Luminous flux (emergency) (lm)	430
Total power consumption (W)	36
Electrical protection	Class II
Control gear type	LED driver constant current

START Surface IP54 Multipower 4000lm 830/840 EM 0043413

LED Flickering Rate	Low (6% - 20%)
Housing colour	RAL 9003 - Signal white
IP rating	IP54
IK rating	IK03
Product EAN number	5410288434131
Warranty	5 years

Photometry

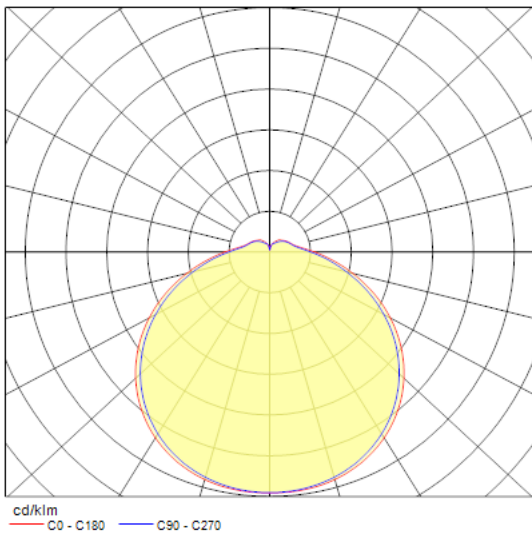

Technical drawings

