


13-2628H-2: Nut for eurocone,ins. and jointing ring to copper compress 26x28

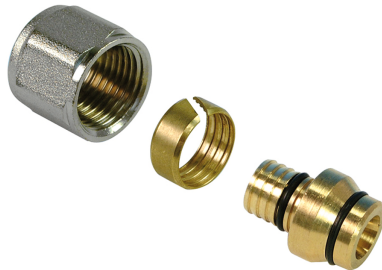

Commercial information

- Korte en directe aansluiting van messingknelkoppeling naar Henco buis
- Conische dichting in combinatie met O-ring zorgt voor 100% gegarandeerde verbinding
- KIWA keur

Basic unit dimensions

Height	43 mm
Length	30 mm
Width	43 mm
Net weight	0.151 kg

Certificates

ATG, ETA, KIWA, ÖVGW Wasser, WRAS, KOMO, ÖN EN 21003-2/-3, GOST-R, ITC, TSU, PZH, Sans 21003, Kontrol Biro, EMI

Applications

Potable water, Heating, Cooling, Sanitary

Solutions

Building installations, Industry, Utility, Shipbuilding

Technical characteristics

Material connection 1	Brass	Bend radius	0 Millimetre
Material quality connection 1	CuZn40Pb2 (CW617N)	Outer pipe diameter connection 1	26 Millimetre
Surface protection connection 1	Untreated	Outer pipe diameter connection 2	28 Millimetre
Surface treatment connection 1	Untreated	Length	30 Millimetre
Material connection 2	Brass	Length of connection 1	12.7 Millimetre
Material quality connection 2	CuZn40Pb2 (CW617N)	Working length connection 1	12.7 Millimetre
Surface protection connection 2	Untreated	Length of connection 2	12.5 Millimetre
Surface treatment connection 2	Untreated	Working length connection 2	12.5 Millimetre
Shape	Straight	Wrench width	0 Millimetre
Reducing	✗	Wrench width union nut	0 Millimetre
Eccentric	✗	Medium temperature (continuous)	-10 70 Degrees celsius
System specific	✓	Max. operating pressure at 20 °C	10 Bar
Connection 1	Compression ring	Standard Dimension Ratio (SDR)	5
Connection 2	Euroconus (expired)		
Main colour fitting	Brass		
Material sealing	Ethylene-propylene diene monomer rubber (EPDM)		
With buffer stud	✓		
High tensile strength	✗		
With thermal insulation	✗		
Ring stiffness class	Other		
With sealing rings/gaskets	✓		
Capped	✗		
With drain valve	✗		
With de-aerator	✗		
FM quality mark	✗		
LPCB quality mark	✗		
ULC quality mark	✗		
UL quality mark	✗		
DIN-CERTCO certificate	✗		
VdS quality mark	✗		
With approval for TÜV	✗		
DVGW quality mark for gas	✗		
DVGW quality mark for water	✗		
KIWA certified	✓		
Gastec QA mark	✗		
KOMO certified	✓		
Type approval according to BBR/EKS	✗		