


## Walraven Heavy Duty Clamp HD500 (M10/12) (BUP1000)

(B1005)

for steel pipes

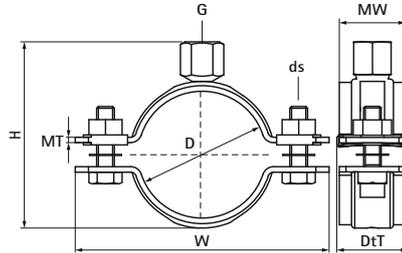

### Features & benefits

- two-part clamp with two locking bolts
- heavy design
- bolts secured with anti-loss washer
- with CO<sub>2</sub> welded connection nut
- material: steel
- surface protection:
- product is part of the Walraven BIS UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227
- also available: noise insulating lining of silicone rubber (reddish brown), heat resistant up to +200 °C (A 35 15)
- tested for fire safety



Product Number	VVS Number	DN	Pipe Diameter Imperial	Connection Thread	Total Height	Total Width	Total Depth	Material Width	Material Thickness	Screw Size	Maximum Allowed Load Faz	Approvals
Reference letter		D	D	G	H	W	DtT	MW	MT	ds	F <sub>a,z</sub>	
Unit description			"		mm	mm	mm	mm	mm		N	
33048078	018024163	DN 65	2½	M10/M12	115	137	32	30	3.00	M8	4,000	CE, ETA, RAL-GZ 655/B, RAL-GZ 656, VdS, ITB (KOT), FM, EPD
33048085	018024165			M10/M12	122	144	32	30	3.00	M8	4,000	CE, ETA, RAL-GZ 655/B, RAL-GZ 656, VdS, ITB (KOT), EPD
33048092	018024167	DN 80	3	M10/M12	129	151	32	30	3.00	M8	4,000	CE, ETA, RAL-GZ 655/B, RAL-GZ 656, VdS, ITB (KOT), FM, EPD
33048106	018024172			M10/M12	143	165	32	30	3.00	M8	4,000	CE, ETA, RAL-GZ 655/B, RAL-GZ 656, VdS, ITB (KOT), EPD
33048116	018024175	DN 100	4	M10/M12	153	175	32	30	3.00	M8	4,000	CE, ETA, RAL-GZ 655/B, RAL-GZ 656, VdS, ITB (KOT), EPD
33048123				M10/M12	160	182	32	30	3.00	M8	4,000	CE, ETA, RAL-GZ 655/B, RAL-GZ 656, ITB (KOT), EPD
33048133	018024178			M10/M12	170	192	32	30	3.00	M8	4,000	CE, ETA, RAL-GZ 655/B, RAL-GZ 656, ITB (KOT), EPD
33048140	018024179	DN 125	5	M10/M12	177	199	32	30	3.00	M8	4,000	CE, ETA, RAL-GZ 655/B, RAL-GZ 656, VdS, ITB (KOT), EPD
33048154	018024181			M10/M12	191	213	32	30	3.00	M8	4,000	CE, ETA, RAL-GZ 655/B, ITB (KOT), EPD
33048169	018024183	DN 150	6	M10/M12	206	240	38	38	4.00	M10	8,200	CE, ETA, VdS, ITB (KOT), EPD, RAL-GZ 655/B
33048183	018024184			M10/M12	220	255	38	38	4.00	M10	8,200	CE, ETA, ITB (KOT), EPD, RAL-GZ 655/B
33048202	018024185			M10/M12	239	274	38	38	4.00	M10	8,200	CE, ETA, ITB (KOT), EPD, RAL-GZ 655/B
33048219	018024186			M10/M12	256	291	38	38	4.00	M10	8,200	CE, ETA, ITB (KOT), EPD, RAL-GZ 655/B
33048227	018024187	DN 200	8	M10/M12	264	299	38	38	4.00	M10	8,200	CE, ETA, ITB (KOT), EPD, RAL-GZ 655/B