


## VEK-060504-Z: Manifold 1" with "3/4" male threaded outlets for eurocone, 1" 4x3/4" EK

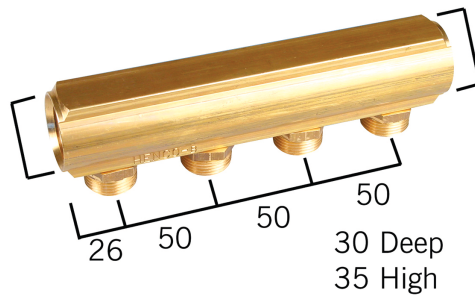

### Commercial information

Brass distributor 1" without vent opening with number of euro cone connections

#### Basic unit dimensions

|            |          |
|------------|----------|
| Height     | 58 mm    |
| Length     | 203 mm   |
| Width      | 38 mm    |
| Net weight | 1.053 kg |

#### Certificates

#### Applications

Potable water, Heating, Cooling, Sanitary

#### Solutions

Building installations, Industry, Utility

## Technical characteristics

|                                    |                                                |                                      |                    |
|------------------------------------|------------------------------------------------|--------------------------------------|--------------------|
| Suitable for tap water             | ✓                                              | Number of branches                   | 4                  |
| Suitable for central heating water | ✓                                              | Number of branching directions       | 1                  |
| Suitable for cooling water         | ✓                                              | Distance between offset              | 50 Millimetre      |
| Suitable for compressed air        | ✗                                              | Max. medium temperature (continuous) | 95 Degrees celsius |
| Suitable for glycol                | ✓                                              | Width                                | 38 Millimetre      |
| Mounting method                    | Surface mounting                               | Height                               | 58 Millimetre      |
| Model                              | Distributor/collector                          | Depth                                | 30 Millimetre      |
| Material                           | Brass                                          | Length distributor                   | 203 Millimetre     |
| Surface protection                 | Untreated                                      |                                      |                    |
| Shape                              | Throughflow with straight branches             |                                      |                    |
| Nominal diameter connection 2      | 1 inch (25)                                    |                                      |                    |
| Connection 2                       | Internal thread cylindrical BSPP-G (ISO 228-1) |                                      |                    |
| Nominal diameter branches          | 3/4 inch (20)                                  |                                      |                    |
| Connection branches                | Euroconus (expired)                            |                                      |                    |
| Deviant distance between branches  | ✗                                              |                                      |                    |
| With filling/drain tap             | ✗                                              |                                      |                    |
| System specific                    | ✓                                              |                                      |                    |
| With shut-off valve                | ✗                                              |                                      |                    |
| With de-aeration                   | ✗                                              |                                      |                    |
| With wall-mounting bracket         | ✗                                              |                                      |                    |
| With mounting material             | ✗                                              |                                      |                    |
| With legs                          | ✗                                              |                                      |                    |
| With insulation                    | ✗                                              |                                      |                    |
| KOMO certified                     | ✗                                              |                                      |                    |
| Type approval according to BBR/EKS | ✗                                              |                                      |                    |