

# 7.2.2 Safety - High degree of protection

Outdoor Wall

Emergency lighting



- For indoor and outdoor use
- Robust construction from Aluminium diecast and high impact resistant cover made of polycarbonate
- Optional with self-regulating battery heater for use at low temperature down to -20°C

7

### Light Source:

2 x 1.6 W LED

### Materials:

Diecast Aluminium housing  
Polycarbonate lens

### Installation:

Wall mounting above exit door or along escape routes

### Operation:

For maintained and non-maintained operations  
CGLine+ (Without working in AT mode)

Manual test with magnet

### Applications:

Factories, warehouses, underground car parks, workshops, tunnel


Installation on emergency exits inside and outside buildings

The durable cast Aluminium along with the high degree of protection (IP65) makes this outdoor wall unit particularly suitable for industrial areas, underground car parks and tunnels.


Outdoor Wall has been developed to be mounted on the wall above the safety exits of a building both inside and outside, thanks to the special design which allows 90° installation and ensures the uniform illumination level required by law.

The optical asymmetric lens are optimally designed to spread light in corridors and escape routes.

For application with low ambient temperature down to -20°C, e.g. outdoors, the Outdoor LED is available also with a self-regulating battery heater.

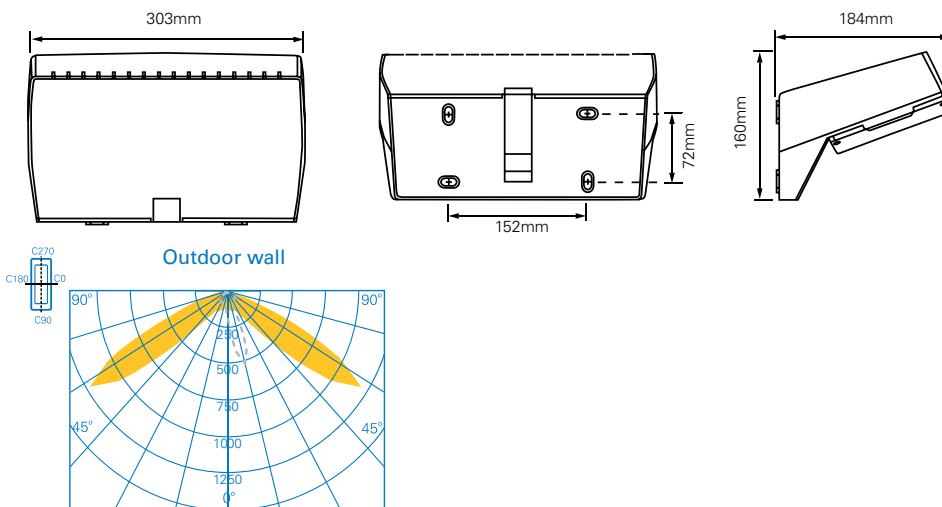

Outdoor LED light coverage

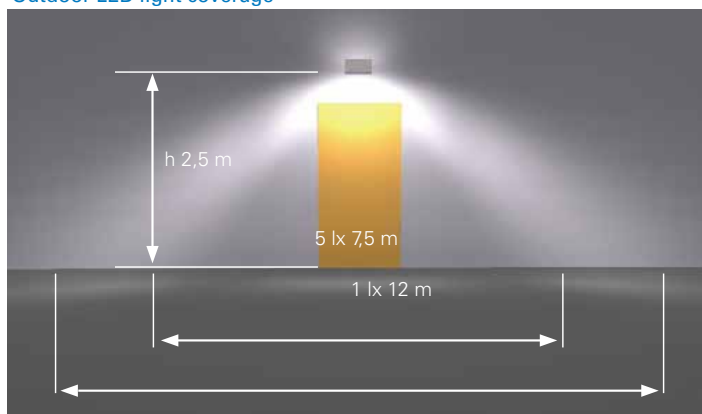

Order code	Description					
40071354874	Outdoor Wall 1-8h CGLine+	7.2 VA/7.0 W	225lm	1 - 3 - 8 h	3.7V / 4Ah	Maintained / Non-Maintained
40071354879	Outdoor Wall 1-8h CGLine+ H (with battery heater)	9.2 VA/9.3 W	225lm	1 - 3 - 8 h	3.7V / 4Ah	Maintained / Non-Maintained