

— E200

End of Life Instruction

Decommissioning instructions available to enable responsible recycling or disposal



PREPARED 2024-08-05 Stefan Michel	DOCUMENT KIND EoL Instructions	SECURITY LEVEL Public		
OWNING ORGANIZATION ABB - ELSB	DOCUMENT ID. 9AKK108469A1170	REV. B	LANG. en	PAGE 1/5

Contents

- 1. Purpose and Basic Description 3**
- 2. Dismantling instructions 3**
 - 2.1. More than 1 pole product:.....3
 - 2.2. 1 pole product:.....3
- 3. Constituent materials 5**
- 4. Additional Information..... 5**

1. Purpose and Basic Description


This product family is in the scope of European Union directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE). The product family must be disposed according to the legislation of the country. This end-of-life instruction is intended for use by customers and recycling companies which outline the responsible recycling or disposal method of the ABB product.

The switch disconnecter E200 is designed to be used in installations, where switching of mixed resistive and inductive loads, including moderate overloads is required.

2. Dismantling instructions

2.1. More than 1 pole product:


In case of more than 1 pole, first, the handle toggle⁽¹⁾ and some rivet pieces⁽²⁾ should be removed to split the product into simple poles.

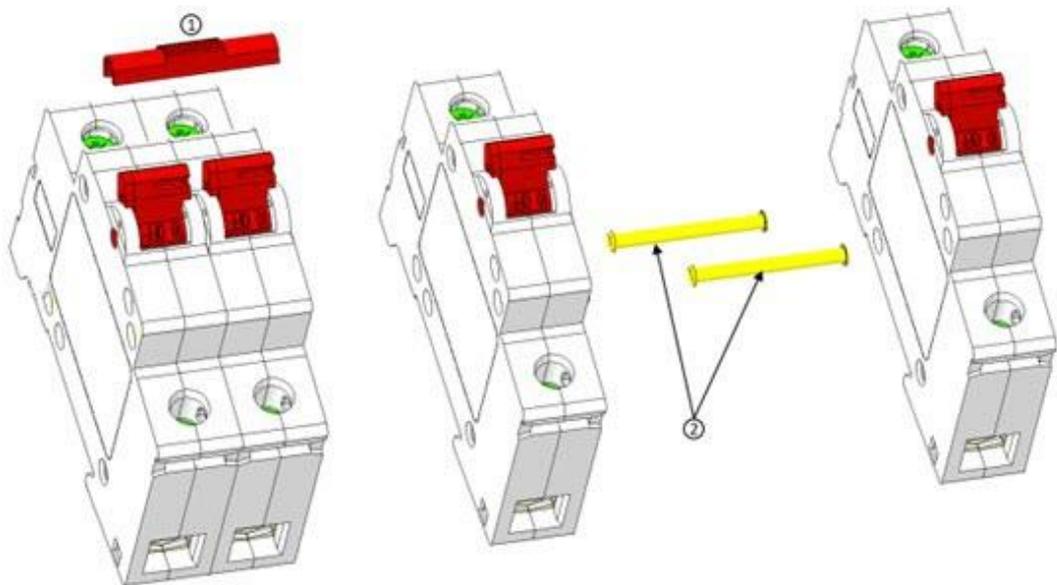


2.2. 1 pole product:

On that point, all single poles will be dismantling on the same way.

Firstly, remove the rivets, then you will be able to take out the cover and access to all the internal parts.

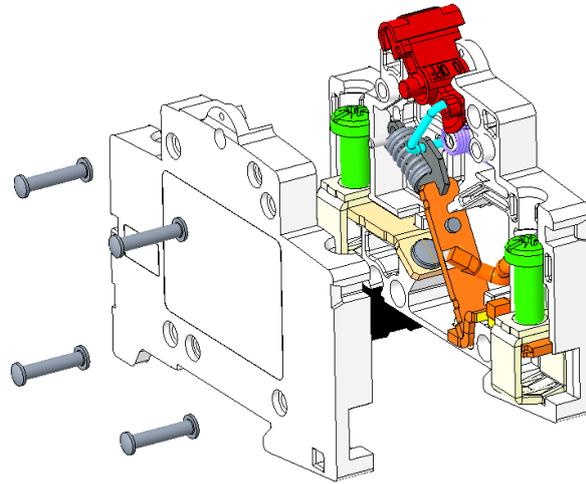

The different parts will be extracted until reaching the configuration of the figure below.

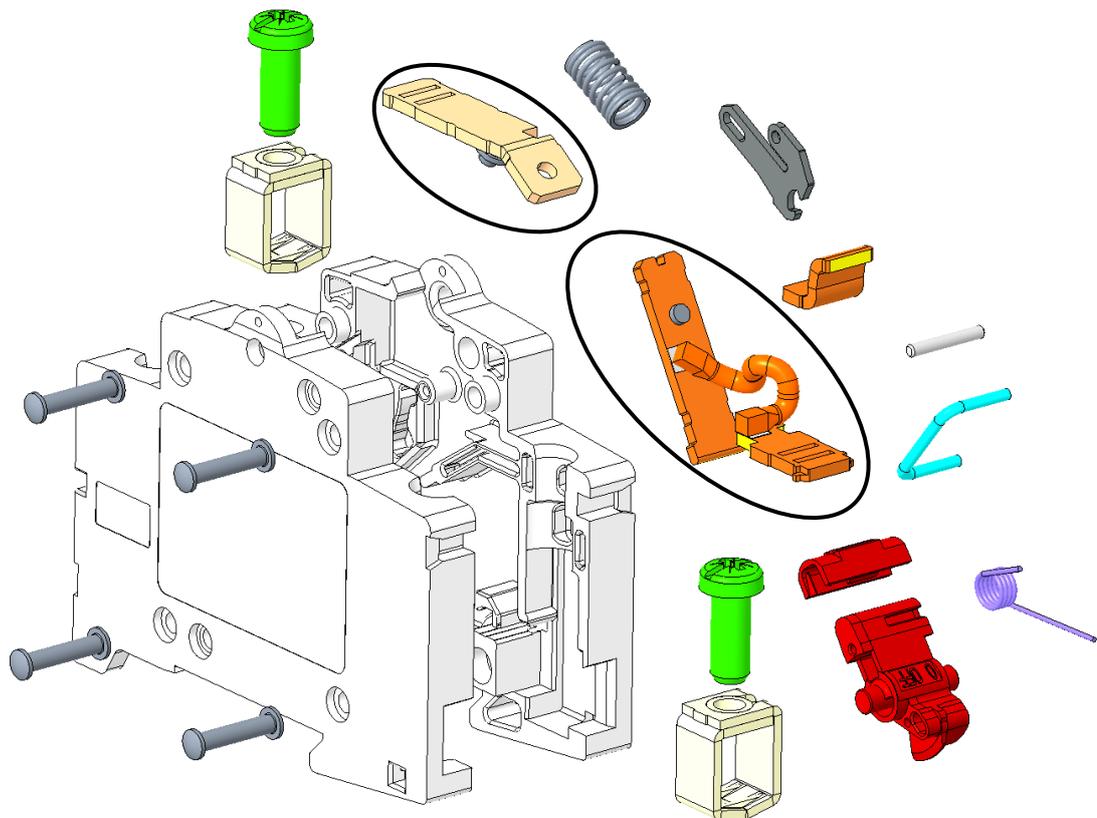

Rounded parts have soldered or riveted pieces that cannot be manually disassembled.

3. Constituent materials

Plastics		Metals		Packaging	
PMC	48.5%	Steel	22.6%	Cardboard	6.4%
PA	1.9%	Copper	17.5%	Others	0.1%
POM	1.6%	Aluminum	1.2%		
		Others	0.2%		

Weight percentage of a single pole.

4. Additional Information

Weight per Pole	98.39 g
Overall dimensions (H x D x W)	85 x 69 x 17.5 mm
Recyclability rate	38.1%