


## Sterling Bulkhead - LED

STERLING IP65 IK10 1477LM 840 BLACK  
4063835



### Product features

- Led exterior bulkhead, Unique feature allowing a choice between High Output or High Efficiency with the flick of a switch, die-cast aluminium body, 759/1477LM, 9/17W, 84/87LM/W, 4000K, Driver Current: 350/750mA, CRI80, Non dimmable, IP65, IK10, lifespan 100,000hrs (L70:B50), (HxWxD) 350 x 350 x 128mm, 3.4kg, 3 step MacAdam ellipse, RAL 9005, Class 1, 230V, energy class: A++, A+, A

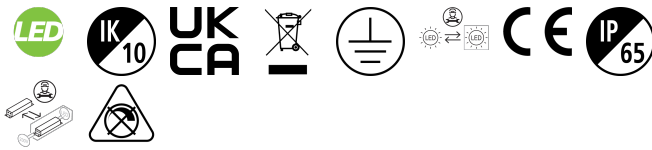


### PRODUCT OVERVIEW

Product name	STERLING IP65 IK10 1477LM 840 BLACK
Technology	LED
Cap/Base	N/A
Environment	Indoor, Outdoor
General application	Education, Hospitality, Logistics & Industry, Office, Residential & Consumer, Retail
ETIM Class	EC002892
E-number FI	4579256
Warranty	5 years
Fixture luminous flux (lm)	1477
Luminaire efficacy (lm/W)	87
LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Photobiological Risk Group	RG1
Total power consumption (W)	17
Electrical protection	Class I
Dimmable	No
Housing colour	Black
IP rating	IP65
IK rating	IK10
Product EAN number	5026524638357

### PHOTOMETRY

## Sterling Bulkhead - LED

STERLING IP65 IK10 1477LM 840 BLACK  
4063835



Distance [m]	Cone diameter [mm]	E(0°) [lx]	E(C0) [lx]	E(C90) [lx]	E(C180) [lx]	E(C270) [lx]	Illuminance [lx]
0.5	1.52	5071	5071	5071	5071	5071	964
1.0	3.04	5071	5071	5071	5071	5071	241
1.5	4.57	5071	5071	5071	5071	5071	107
2.0	6.09	5071	5071	5071	5071	5071	60
2.5	7.61	5071	5071	5071	5071	5071	39
3.0	9.13	5071	5071	5071	5071	5071	27


Distance [m] Cone diameter [mm]

C0 - C180 (Half beam angle: 113.4°)

Distance [m]	Cone diameter [mm]	E(0°) [lx]	E(C0) [lx]	E(C90) [lx]	E(C180) [lx]	E(C270) [lx]	Illuminance [lx]
0.5	1.55	5071	5071	5071	5071	5071	1800
1.0	3.10	5071	5071	5071	5071	5071	450
1.5	4.65	5071	5071	5071	5071	5071	211
2.0	6.21	5071	5071	5071	5071	5071	130
2.5	7.76	5071	5071	5071	5071	5071	77
3.0	9.31	5071	5071	5071	5071	5071	53

Distance [m] Cone diameter [mm]

C0 - C180 (Half beam angle: 114.4°)



## TECHNICAL DRAWINGS

