

## RANA Surface 1200

RANA LED S 1200 HO 3K LOUV+PRI DW GEN2

0051488



### Product features

- Surface or Suspended LED Linear luminaire with Louvre + Prismatic Optic, Direct Light Distribution, Luminaire Dimensions: 1160x187x47mm, Sylvania White body colour, IP20, IK07, Light Engine Dimensions: 1130x165mm, DALI Dimmable (Switch-DIM/Push-DIM enabled), Low LED flicker (+/-5%), Warm White (3000K) LED Colour Temperature, 5800lm, 52W, 112lm/W efficacy, CRI>80, 3 SDCM (3-step MacAdam ellipse) LED Colour Consistency, UGR<19, Luminance at 65° < 3000 cd/m<sup>2</sup>, Lumen Maintenance: L90B10 at 50,000 hours, Quick electrical connection with push-connectors in the luminaire, Glow Wire Test 850°C.





### PRODUCT OVERVIEW

Product name	RANA LED S 1200 HO 3K LOUV+PRI DW GEN2
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling surface mounting, Suspended
General application	Office, Hospitality, Retail, Education
ETIM Class	EC002892
E-number FI	4273656
Warranty	5 years
Useful luminous flux (Fuse)	5800
Fixture luminous flux (lm)	5800
Luminous flux (lm)	5800
Luminaire efficacy (lm/W)	112
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Glare control	< 19
Photobiological Risk Group	RG0
Total power consumption (W)	52
Electrical protection	Class I
Control gear type	Electronic ballast
Dimmable	Yes
Dimming method	DALI, Switch-dim (mains-rated)
Minimum dimming level (%)	1
Housing colour	White
IP rating	IP20
IK rating	IK07
Product EAN number	5410288514888

## RANA Surface 1200

*RANA LED S 1200 HO 3K LOUV+PRI DW GEN2*  
0051488

### PHOTOMETRY

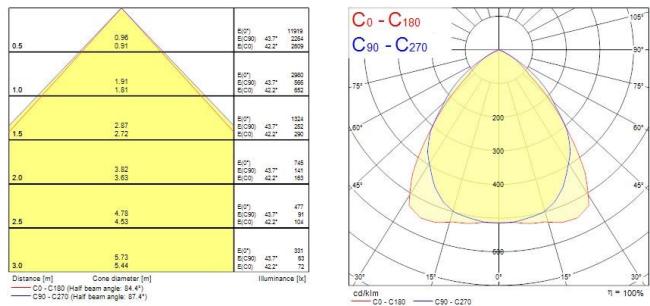

### TECHNICAL DRAWINGS

