




Serie 44 CE - Opbouw waterdichte verdeelkasten conform EN 60670-1 (CEI 23-48) en IEC 60670-22 (CEI 23-94) en gemaakt van hoogwaardige technopolymeren. De serie omvat versies met beschermingsgraad IP44, IP55, IP56 met gladde wanden of met sprintwartels en verschillende soorten deksels: blind/transparant, diep/gewoon, opdruk/schroeven (in kunststof, ook 1/4 slag, of in metaal). Verkrijgbaar in verschillende zelfblussende materialen (tot GWT 960 °C). Geschikt voor gewone aansluitingen, voor speciaal gebruik en voor industrieel gebruik.

Isolatie klasse	II (volgens IEC 61140 normen)	IP waarde	IP44
Materiaal	Technopolymeer GWPLAST 75	Mechanische weerstand	IK07
Interne afm. LxHxD (mm)	Ø 65 x 35	Ingangen Aant. gaten / Ø	4 / 23
Toepassing	Speciaal gebruik	Gloeidraadtest	960 °C
Kleur doos	Rood RAL 3000	Kleur deksel	Grijs RAL 7035
Deksel	Gewoon opdrukbaar	Bedrijfstemperatuur	-25 +60 °C
Electrocod	02210	Thermodruk met kogel	75 °C
Muren	Met kabelwartels	Accessoires voor isolatieherstel	GW44622



BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

Saline solution	Acids		Bases		Solvents				Mineral oil	UV rays
	Concentrated	Diluted	Concentrated	Diluted	Hexane	Benzol	Acetone	Alcohol		
Resistant	Limited resistance	Resistant	Resistant	Resistant	Limited resistance	Not resistant	Not resistant	Limited resistance	Limited resistance	Limited resistance

DIMENSIONAL

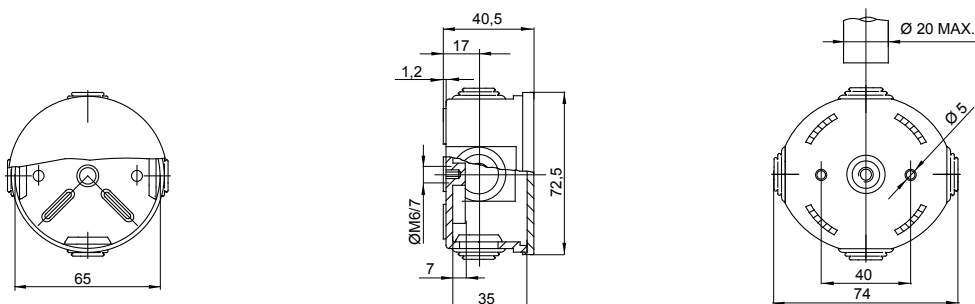

TECHNICAL SYMBOLOGY



STANDARDS/APPROVALS

