


MS165 - 62,0 ... 73,0A
Motorschutzeschalter/ Manual Motor Starter

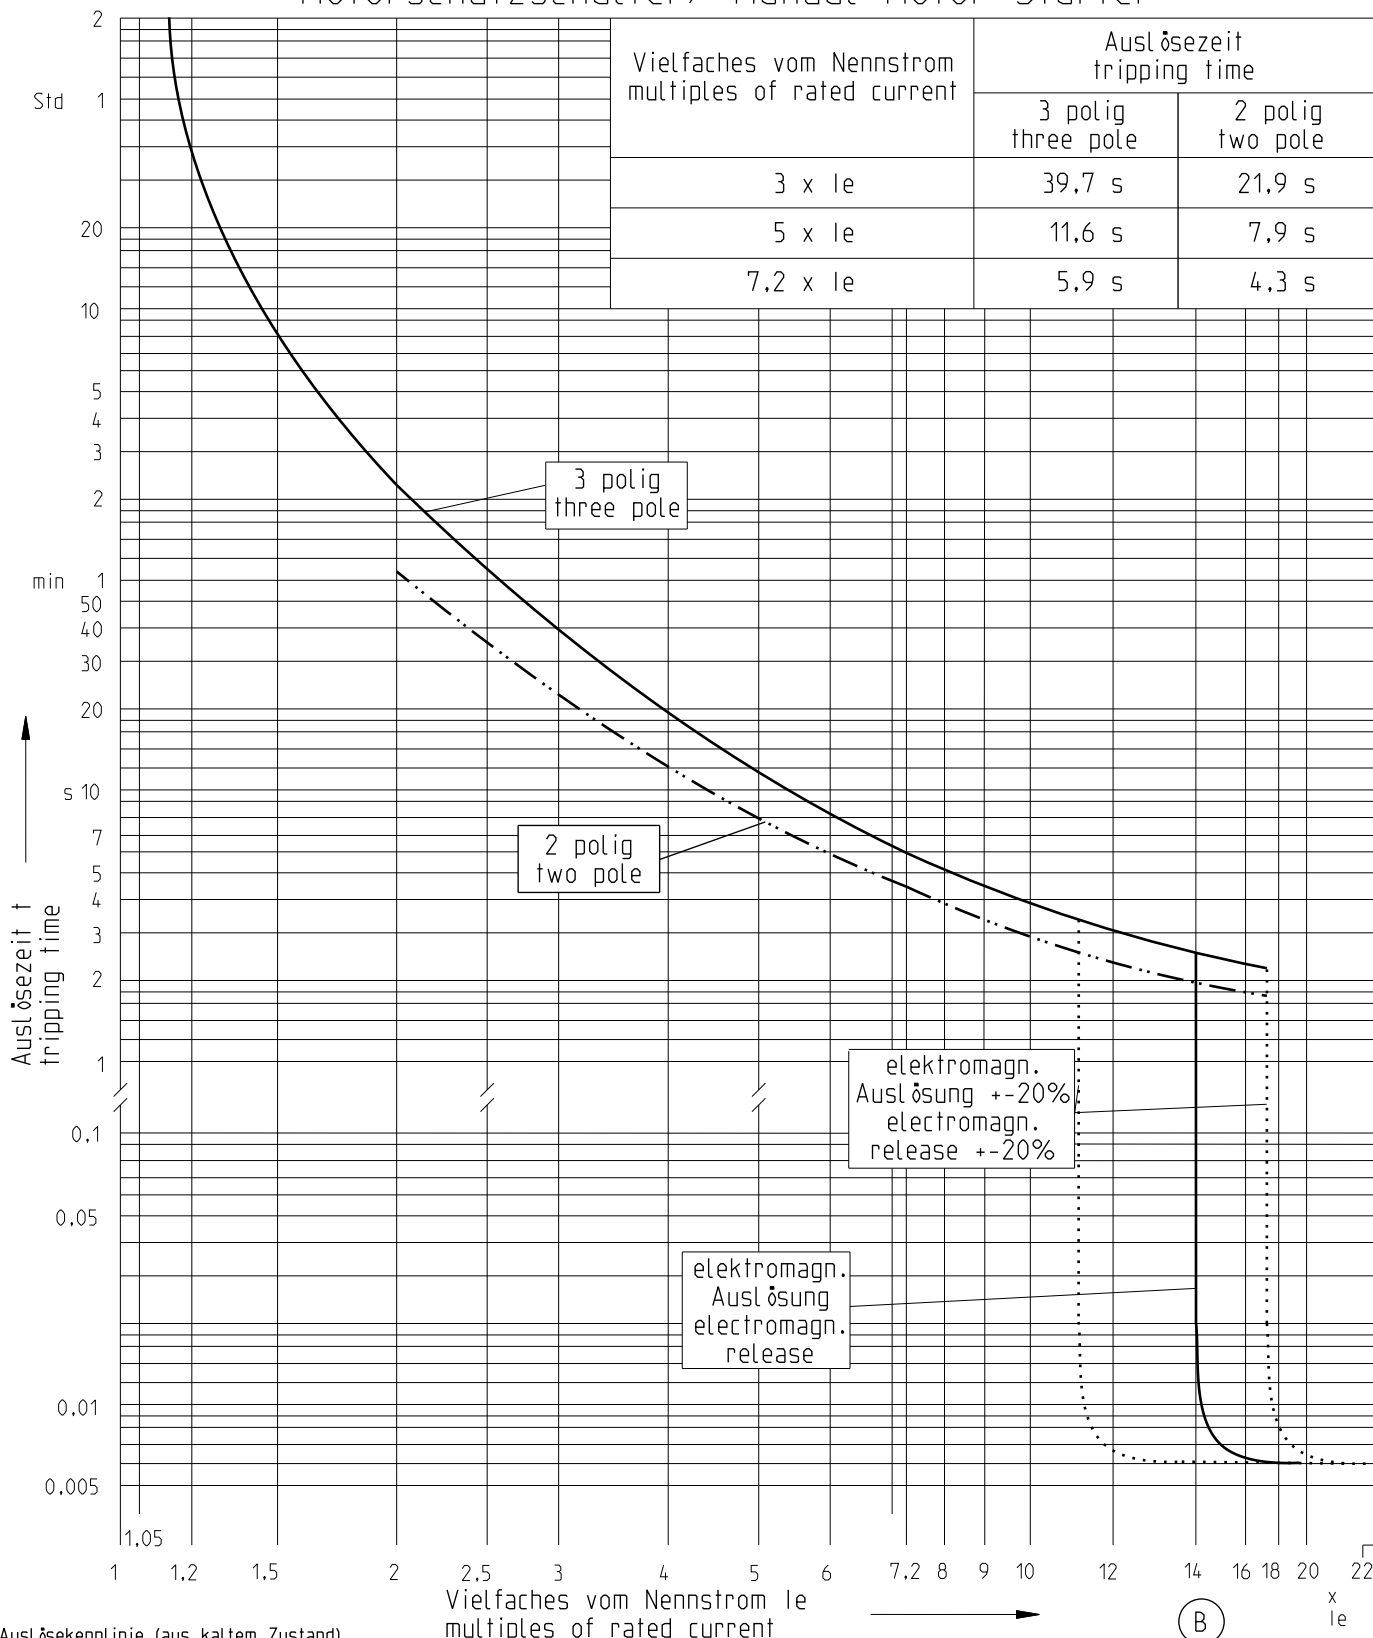

Auslösekennlinie (aus kaltem Zustand)

Die Ansprechwerte der elektromagnet. Auslöser beziehen sich auf Skala Maximum $I_{e_{max}}$

Für Nennströme (3-polig) zwischen dem 3- und 8-fachen des Einstellwertes beträgt die Toleranz der Auslösezeit $\pm 20\%$

Tripping characteristic (from cold state)

The values of the electromagn. release refer to scale maximum

For currents (3-pole) between 3 and 8 times the current setting the tolerance of the tripping time is $\pm 20\%$

Proprietary and
Secret Information

Created by		Frank Hustert			Checked by		Boris Schulmann		Approved by		Juergen S. Schmidt				
Created on		2022-03-29			Checked on		2022-05-03		Approved on		2022-05-03				
ECN number		ECN000205518		ECN date		2022-06-01		Department		CDM		Scale		%	
Revision	B	NoM	1	PRU	DESTO										
Partname		MODEL NAME B.3						Drawing		1SAM400505_08 B.3					
		Title (DE) Auslösekennlinie MS165								Format	Language	Sheet No.	No. Sheets		
										A4	DE/EN	8	9		
		Title (en) Tripping characteristic MS165								1SAM400505					