

# Concord

## MYRIAD ADJ ROUND WHITE 4000K PHDIM WHITE BEZ 2056212



### Features

- The Myriad Adjustable Round recessed spotlight is a high efficient accent downlight, fixture color RAL 9016 - Traffic white / Bezel, correlated colour temperature of 4000K, color rendering index Ra89, fixture lumen 702lm, total power consumption 10W, luminaire efficacy 70 lm/W, nominal light beam angle 24°, mains voltage 230-240V~ AC, control technology type: leading edge/trailing edge phase dim, product length 76mm, width 76mm, height 115mm, cut-out dimension 76mm, IP rating IP20, 5 years warranty.

### Product Overview

Product name	MYRIAD ADJ ROUND WHITE 4000K PHDIM WHITE BEZ
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling recessed mounting
Environment	Indoor
E-number FI	4278801
Fixture luminous flux (lm)	702
Luminaire efficacy (lm/W)	70
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Photobiological Risk Group	RG1
Total power consumption (W)	10
Electrical protection	Class II
Control gear type	Electronic ballast
Control gear mounting	Integral
Housing colour	White

# Concord

## MYRIAD ADJ ROUND WHITE 4000K PHDIM WHITE BEZ 2056212

IP rating

IP20

IK rating

IK02


Product EAN number

5025768562121


Warranty

5 years

### Photometry

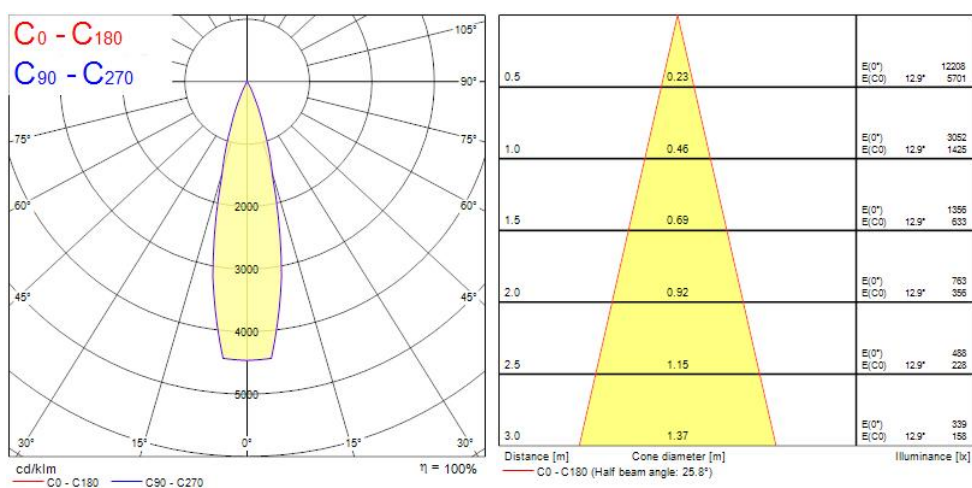

### Technical drawings

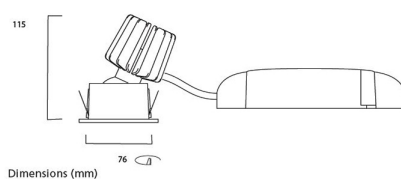

# Concord

## MYRIAD ADJ ROUND WHITE 4000K PHDIM WHITE BEZ 2056212

### Data table

#### GENERAL DATA

Product name	MYRIAD ADJ ROUND WHITE 4000K PHDIM WHITE BEZ
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling recessed mounting
Environment	Indoor
Performance ambient temperature Tq (°C)	25
E-number FI	4278801
Warranty	5 years

#### OPTICAL DATA

Fixture luminous flux (lm)	702
Luminaire efficacy (lm/W)	70
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Adjustable chromaticity	N
Photobiological Risk Group	RG1

#### ELECTRICAL DATA

Total power consumption (W)	10
Primary Supply/Product voltage - min (V)	230
Electrical protection	Class II
Control gear required	No
Control gear type	Electronic ballast
Control gear mounting	Integral

# Concord

## MYRIAD ADJ ROUND WHITE 4000K PHDIM WHITE BEZ 2056212

Drive current (mA)	250
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz

### LIFETIME DATA

Lifespan L70 B50	100000
Lifespan L80 B20	100000
Lifespan L90 B10	68500

### PHYSICAL DATA

Housing colour	White
IP rating	IP20
IK rating	IK02
Diffuser material	Glass
Nominal Product Width (mm)	76
Max. Lamp Diameter (mm) - D	90
Weight (kg)	0.38
Recessed Depth (mm)	115

### PACKAGING

Single packaging type	Carton
Product EAN number	5025768562121
Packaging single width (cm)	15.0
Packaging single depth (cm)	17.5
DUN14 (outer)	05025768562121
Packaging outer length / height (cm)	17.5

### SAFETY DATA

Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No