

# Concord

## MYRIAD ADJ ROUND WHITE 4000K PHDIM WHITE BEZ 2056212



### Features

- The Myriad Adjustable Round recessed spotlight is a high efficient accent downlight, fixture color RAL 9016 - Traffic white / Bezel, correlated colour temperature of 4000K, color rendering index Ra89, fixture lumen 702lm, total power consumption 10W, luminaire efficacy 70 lm/W, nominal light beam angle 24°, mains voltage 230-240V~ AC, control technology type: leading edge/trailing edge phase dim, product length 76mm, width 76mm, height 115mm, cut-out dimension 76mm, IP rating IP20, 5 years warranty.

### Product Overview


|                                 |  |
|---------------------------------|--|
| Product name                    | MYRIAD ADJ ROUND WHITE 4000K PHDIM WHITE BEZ |
| Technology                      | LED  |
| Cap/Base                        | N/A  |
| Housing                         | PC Polycarbonate                             |
| Mount                           | Ceiling recessed mounting                    |
| Environment                     | Indoor                                       |
| E-number FI                     | 4278801                                      |
| Fixture luminous flux (lm)      | 702  |
| Luminaire efficacy (lm/W)       | 70   |
| LOR (%)                         | 100  |
| Colour temperature (K)          | 4000   |
| Light colour                    | Neutral White                                |
| CRI (Ra)                        | 90   |
| Colour Variation Initial (SDCM) | 3  |
| Photobiological Risk Group      | RG1  |
| Total power consumption (W)     | 10   |
| Electrical protection           | Class II                                     |
| Control gear type               | Electronic ballast                           |
| Control gear mounting           | Integral                                     |
| Housing colour                  | White  |

# Concord

## MYRIAD ADJ ROUND WHITE 4000K PHDIM WHITE BEZ 2056212

|                    |               |
|--------------------|---------------|
| IP rating          | IP20          |
| IK rating          | IK02          |
| Product EAN number | 5025768562121 |
| Warranty           | 5 years       |

### Photometry

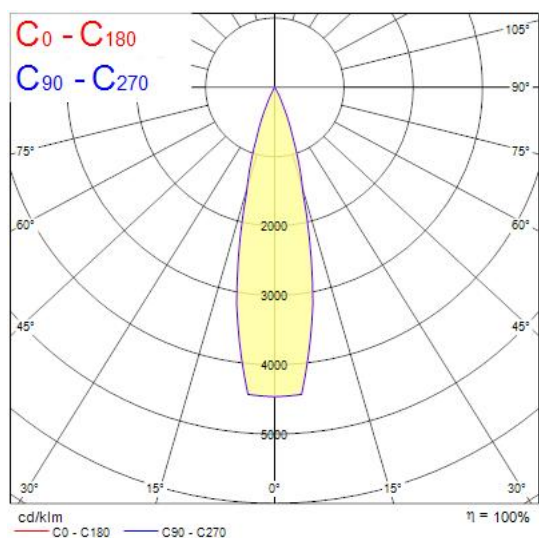

### Technical drawings

