

Concord

MYRIAD ADJ ROUND WHITE 4000K DALI WHITE BEZ 2056213



Features

- The Myriad Adjustable Round recessed spotlight is a high efficient accent downlight, fixture color RAL 9016 - Traffic white / Bezel, correlated colour temperature of 4000K, color rendering index Ra90, fixture lumen 702lm, total power consumption 10W, luminaire efficacy 70 lm/W, nominal light beam angle 24°, mains voltage 230-240V~ AC, control technology type: DALI, product length 76mm, width 76mm, height 115mm, cut-out dimension 76mm, IP rating IP20, 5 years warranty.

Product Overview

Product name	MYRIAD ADJ ROUND WHITE 4000K DALI WHITE BEZ
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling recessed mounting
Environment	Indoor
Fixture luminous flux (lm)	702
Luminaire efficacy (lm/W)	70
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Photobiological Risk Group	RG1
Total power consumption (W)	10
Electrical protection	Class II
Control gear type	Electronic ballast
Control gear mounting	Integral
Housing colour	White
IP rating	IP20

Concord

MYRIAD ADJ ROUND WHITE 4000K DALI WHITE BEZ 2056213

IK rating

IK02


Product EAN number

5025768562138


Warranty

5 years

Photometry

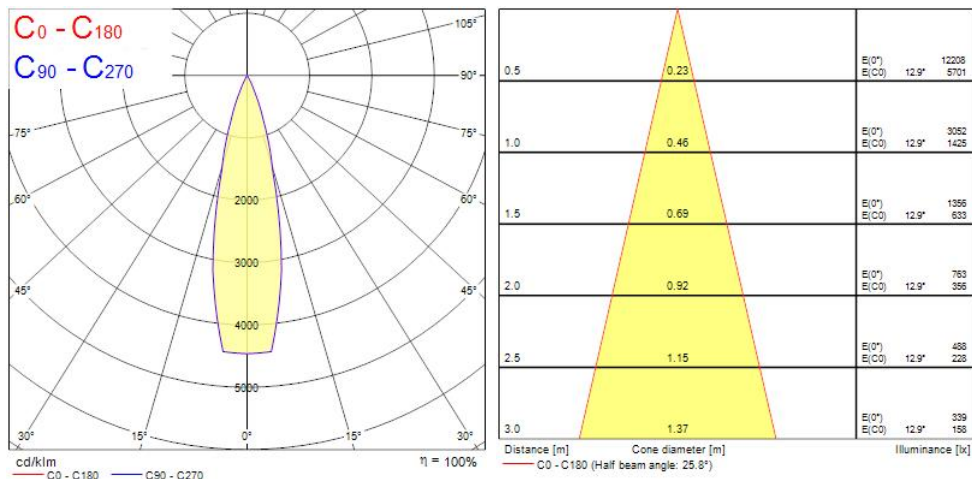

Technical drawings

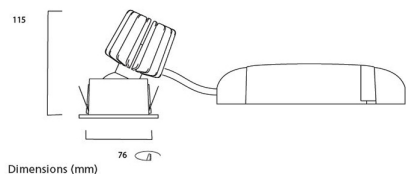

Data table

Concord

MYRIAD ADJ ROUND WHITE 4000K DALI WHITE BEZ 2056213

GENERAL DATA

Product name	MYRIAD ADJ ROUND WHITE 4000K DALI WHITE BEZ
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling recessed mounting
Environment	Indoor
Performance ambient temperature Tq (°C)	25
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	702
Luminaire efficacy (lm/W)	70
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Adjustable chromaticity	N
Photobiological Risk Group	RG1

ELECTRICAL DATA

Total power consumption (W)	10
Primary Supply/Product voltage - min (V)	230
Electrical protection	Class II
Control gear required	No
Control gear type	Electronic ballast
Control gear mounting	Integral
Drive current (mA)	250
Energy Efficiency Class (A->G) of contained light source	E

Concord

MYRIAD ADJ ROUND WHITE 4000K DALI WHITE BEZ 2056213

Nominal Frequency (Hz)	50/60Hz
------------------------	---------

LIFETIME DATA

Lifespan L70 B50	100000
Lifespan L80 B20	100000
Lifespan L90 B10	68500

PHYSICAL DATA

Housing colour	White
IP rating	IP20
IK rating	IK02
Diffuser material	Glass
Nominal Product Width (mm)	76
Max. Lamp Diameter (mm) - D	90
Weight (kg)	0.38
Recessed Depth (mm)	115

PACKAGING

Single packaging type	Carton
Product EAN number	5025768562138
Packaging single width (cm)	15.0
Packaging single depth (cm)	17.5
DUN14 (outer)	05025768562138
Packaging outer length / height (cm)	17.5

SAFETY DATA

Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No