

# Concord

## MYRIAD ADJ ROUND WHITE 4000K PHDIM SILVER BEZ 2056214



### Features

- The Myriad Adjustable Round recessed spotlight is a high efficient accent downlight, fixture color RAL 9016 - Traffic white / Bezel, correlated colour temperature of 4000K, color rendering index Ra91, fixture lumen 702lm, total power consumption 10W, luminaire efficacy 70 lm/W, nominal light beam angle 24°, mains voltage 230-240V~ AC, control technology type: leading edge/trailing edge phase dim, product length 76mm, width 76mm, height 115mm, cut-out dimension 76mm, IP rating IP20, 5 years warranty.

### Product Overview

|                                 |   |
|---------------------------------|---|
| Product name                    | MYRIAD ADJ ROUND WHITE 4000K PHDIM SILVER BEZ |
| Technology                      | LED   |
| Cap/Base                        | N/A   |
| Housing                         | PC Polycarbonate                              |
| Mount                           | Ceiling recessed mounting                     |
| Environment                     | Indoor  |
| Fixture luminous flux (lm)      | 702   |
| Luminaire efficacy (lm/W)       | 70  |
| LOR (%)                         | 100   |
| Colour temperature (K)          | 4000  |
| Light colour                    | Neutral White                                 |
| CRI (Ra)                        | 90  |
| Colour Variation Initial (SDCM) | 3   |
| Photobiological Risk Group      | RG1   |
| Total power consumption (W)     | 10  |
| Electrical protection           | Class II                                      |
| Control gear type               | Electronic ballast                            |
| Control gear mounting           | Integral                                      |
| Housing colour                  | White   |
| IP rating                       | IP20  |

# Concord

## MYRIAD ADJ ROUND WHITE 4000K PHDIM SILVER BEZ 2056214

IK rating

IK02


Product EAN number

5025768562145


Warranty

5 years

### Photometry

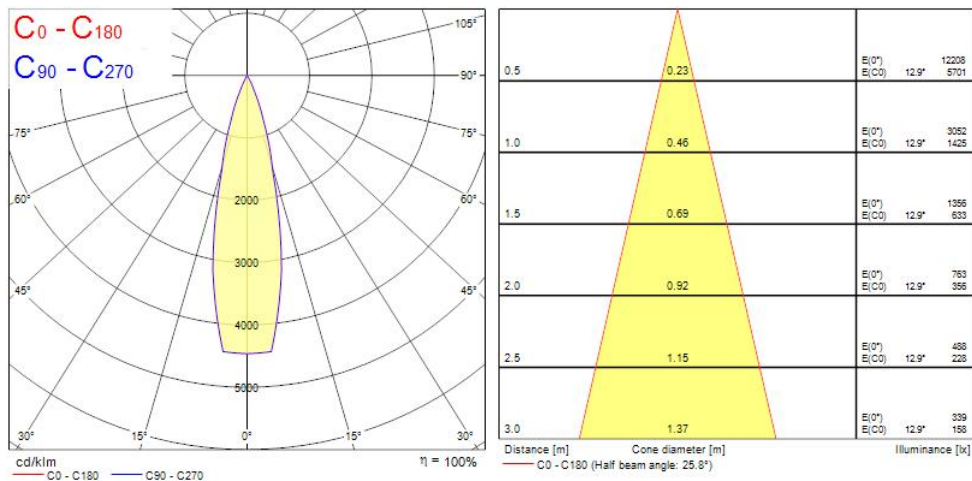

### Technical drawings

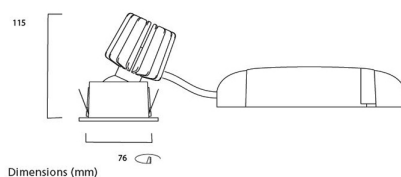

### Data table

# Concord

## MYRIAD ADJ ROUND WHITE 4000K PHDIM SILVER BEZ 2056214

### GENERAL DATA

|   |   |
|---|---|
| Product name                            | MYRIAD ADJ ROUND WHITE 4000K PHDIM SILVER BEZ |
| Technology                              | LED   |
| Cap/Base                                | N/A   |
| Housing                                 | PC Polycarbonate                              |
| Mount                                   | Ceiling recessed mounting                     |
| Environment                             | Indoor  |
| Performance ambient temperature Tq (°C) | 25  |
| Warranty                                | 5 years                                       |

### OPTICAL DATA

|                                 |               |
|---------------------------------|---------------|
| Fixture luminous flux (lm)      | 702           |
| Luminaire efficacy (lm/W)       | 70            |
| LOR (%)                         | 100           |
| Colour temperature (K)          | 4000          |
| Light colour                    | Neutral White |
| CRI (Ra)                        | 90            |
| Colour Variation Initial (SDCM) | 3             |
| Adjustable chromaticity         | N             |
| Photobiological Risk Group      | RG1           |

### ELECTRICAL DATA

|  |                    |
|--|--------------------|
| Total power consumption (W)                              | 10                 |
| Primary Supply/Product voltage - min (V)                 | 230                |
| Electrical protection                                    | Class II           |
| Control gear required                                    | No                 |
| Control gear type  | Electronic ballast |
| Control gear mounting                                    | Integral           |
| Drive current (mA)                                       | 250                |
| Energy Efficiency Class (A->G) of contained light source | E                  |

# Concord

## MYRIAD ADJ ROUND WHITE 4000K PHDIM SILVER BEZ 2056214

|                        |         |
|------------------------|---------|
| Nominal Frequency (Hz) | 50/60Hz |
|------------------------|---------|

### LIFETIME DATA

|                  |        |
|------------------|--------|
| Lifespan L70 B50 | 100000 |
| Lifespan L80 B20 | 100000 |
| Lifespan L90 B10 | 68500  |

### PHYSICAL DATA

|                             |       |
|-----------------------------|-------|
| Housing colour              | White |
| IP rating                   | IP20  |
| IK rating                   | IK02  |
| Diffuser material           | Glass |
| Nominal Product Width (mm)  | 76    |
| Max. Lamp Diameter (mm) - D | 90    |
| Weight (kg)                 | 0.38  |
| Recessed Depth (mm)         | 115   |

### PACKAGING

|                                      |                |
|--------------------------------------|----------------|
| Single packaging type                | Carton         |
| Product EAN number                   | 5025768562145  |
| Packaging single width (cm)          | 15.0           |
| Packaging single depth (cm)          | 17.5           |
| DUN14 (outer)                        | 05025768562145 |
| Packaging outer length / height (cm) | 17.5           |

### SAFETY DATA

|                                     |    |
|-------------------------------------|----|
| Special purpose lamp                | No |
| Dry applications use only           | No |
| Suitable for household illumination | No |