

### Features

- OPTICLIP R 1200 830 1L WHT MP is a high efficacy low glare ceiling recessed mounted luminaire with replaceable light engines for office and education applications. White colour plastic optic (reflector + lens), direct light distribution. Luminaire dimensions: 1195x295x17mm. White body colour (RAL9016), IP40 (from the front), IK07, 8-steps dip switch non-dimmable driver, 15.5-33W power consumption, (output options: 4450lm/33W, 4200lm/31W, 3900lm/28W, 3550lm/25.5W, 3250lm/23W, 2900lm/20.5W, 2550lm/18.5W and 2100lm/15.5W), 3000K (warm white) LED CCT, 4450lm luminous flux at 900mA drive current level, 135lm/W system efficacy, CRI>80, SDCM≤3 (3-step MacAdam ellipse) LED Colour Consistency, UGR<19, luminance at 65° < 2000 cd/m<sup>2</sup>. Lifespan: 100,000 hours L80B20, photobiological safety risk group 1. Electrical protection Class II. Glow wire test 850°C.


### Product Overview

<b>Product name</b>	OPTICLIP R 1200 830 1L WHT MP
<b>Technology</b>	LED (3 SDCM)
<b>Cap/Base</b>	N/A
<b>Housing</b>	Steel
<b>Mount</b>	Ceiling recessed mounting
<b>Fixture rating</b>	Enclosed
<b>General application</b>	Education, Office
<b>ETIM Class</b>	EC002892
<b>Fixture luminous flux (lm)</b>	4450
<b>Luminaire efficacy (lm/W)</b>	135
<b>Correlated colour temperature (k)</b>	3000
<b>Light colour</b>	Warm White

## OPTICLIP R 1200 830 1L WHT MP 0034015

CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	75
Glare control	< 19
Photobiological Risk Group	RG1
Total power consumption (W)	33
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP40/20
IK rating	IK07
Product EAN number	5410288340159
Warranty	5 years
Dimming method	N/A

### Photometry

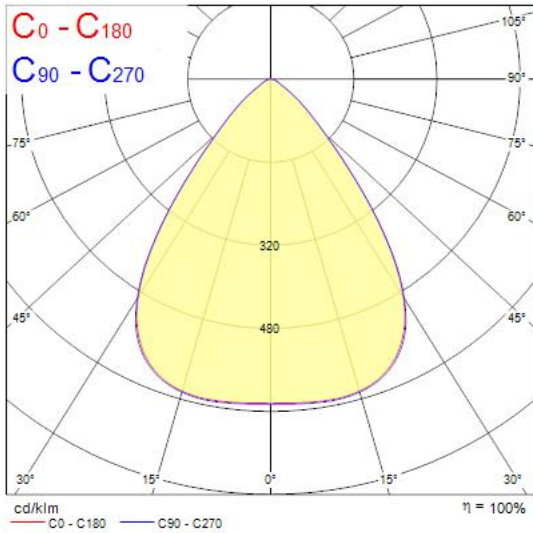

### Technical drawings

