

### Features

- OPTICLIP R 1200 840 1L WHT SSC is a high efficacy low glare ceiling recessed mounted luminaire with replaceable light engines for office and education applications. White colour plastic optic (reflector + lens), direct light distribution. Luminaire dimensions: 1195x295x17mm. White body colour (RAL9016), IP40 (from the front), IK07, SylSmart Standalone capable, 34W power consumption, 4000K (neutral white) CCT, 4700lm luminous flux at 900mA drive current level, 138lm/W system efficacy, CRI>80, SDCM≤3 (3-step MacAdam ellipse) LED Colour Consistency, UGR<19, luminance at 65° < 2000 cd/m<sup>2</sup>. Lifespan: 100,000 hours L80B20, photobiological safety risk group 1. Electrical protection Class II. Glow wire test 850°C.


### Product Overview

Product name	OPTICLIP R 1200 840 1L WHT SSC
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
Fixture rating	Enclosed
General application	Education, Office
ETIM Class	EC002892
Fixture luminous flux (lm)	4700
Luminaire efficacy (lm/W)	138
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	75

## OPTICLIP R 1200 840 1L WHT SSC 0034022

Glare control	< 19
Photobiological Risk Group	RG1
Total power consumption (W)	34
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP40/20
IK rating	IK07
Product EAN number	5410288340227
Warranty	5 years
Dimming method	SylSmart SSC

### Photometry

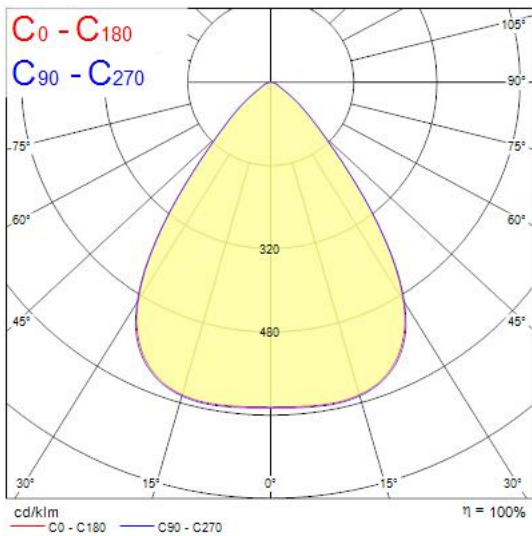

### Technical drawings

