

Features

- OPTICLIP R 1200 940 1L WHT MP is a high efficacy low glare ceiling recessed mounted luminaire with replaceable light engines for office and education applications. White colour plastic optic (reflector + lens), direct light distribution. Luminaire dimensions: 1195x295x17mm. White body colour (RAL9016), IP40 (from the front), IK07, 8-steps dip switch non-dimmable driver, 15.5-33W power consumption, (output options: 4250lm/33W, 4050lm/31W, 3700lm/28W, 3400lm/25.5W, 3100lm/23W, 2750lm/20.5W, 2450lm/18.5W and 2050lm/15.5W), 4000K (neutral white) CCT, 4250lm luminous flux at 900mA drive current level, 129lm/W system efficacy, CRI>90, SDCM≤3 (3-step MacAdam ellipse) LED Colour Consistency, UGR<19, luminance at 65° < 2000 cd/m². Lifespan: 100,000 hours L80B20, photobiological safety risk group 1. Electrical protection Class II. Glow wire test 850°C.


Product Overview

Product name	OPTICLIP R 1200 940 1L WHT MP
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
Fixture rating	Enclosed
General application	Education, Office
ETIM Class	EC002892
Fixture luminous flux (lm)	4250
Luminaire efficacy (lm/W)	129
Correlated colour temperature (k)	4000
Light colour	Neutral White

OPTICLIP R 1200 940 1L WHT MP 0034025

CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Beam Angle (°)	75
Glare control	< 19
Photobiological Risk Group	RG1
Total power consumption (W)	33
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP40/20
IK rating	IK07
Product EAN number	5410288340258
Warranty	5 years
Dimming method	N/A

Photometry

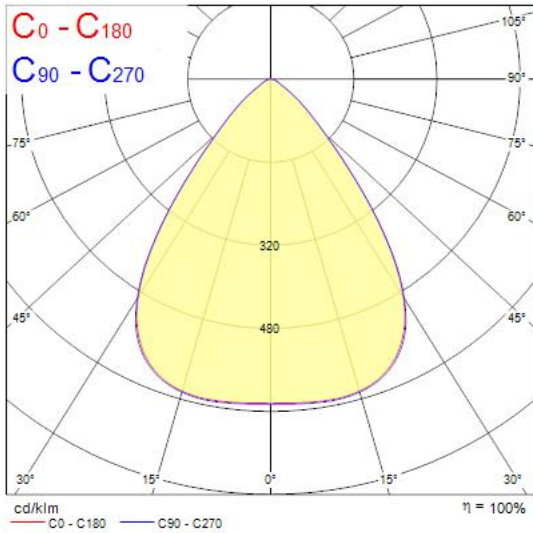

Technical drawings

