


Myriad Adjustable Square - White with Silver bezel

MYRIAD ADJ SQUARE WHITE 3000K PHDIM SILVER BEZ
2056226

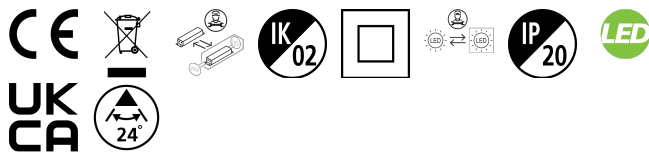

PRODUCT OVERVIEW

Product name	MYRIAD ADJ SQUARE WHITE 3000K PHDIM SILVER BEZ
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling recessed mounting
Environment	Indoor
Warranty	5 years
Fixture luminous flux (lm)	702
Luminaire efficacy (lm/W)	70
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Photobiological Risk Group	RG1
Total power consumption (W)	10
Electrical protection	Class II
Housing colour	White
IP rating	IP20
IK rating	IK02
Product EAN number	5025768562268

DATA TABLE

General data

Product name	MYRIAD ADJ SQUARE WHITE 3000K PHDIM SILVER BEZ
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate

Myriad Adjustable Square - White with Silver bezel

MYRIAD ADJ SQUARE WHITE 3000K PHDIM SILVER BEZ
2056226

Mount	Ceiling recessed mounting
Environment	Indoor
Performance ambient temperature Tq (°C)	25
Warranty	5 years

Optical data

Fixture luminous flux (lm)	702
Luminaire efficacy (lm/W)	70
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Adjustable chromaticity	N
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	10
Primary Supply/Product voltage - min (V)	230
Electrical protection	Class II
Drive current (mA)	250
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz

Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	100000
Lifespan L90 B10	68500

Physical data


Housing colour	White
IP rating	IP20
IK rating	IK02
Nominal Product Width (mm)	76
Weight (kg)	0.38
Recessed Depth (mm)	115

Packaging

Single packaging type	Carton
Product EAN number	5025768562268
Packaging single width (cm)	15.0
Packaging single depth (cm)	17.5
DUN14 (outer)	05025768562268
Packaging outer length / height (cm)	17.5

Myriad Adjustable Square - White with Silver bezel MYRIAD ADJ SQUARE WHITE 3000K PHDIM SILVER BEZ 2056226


PHOTOMETRY

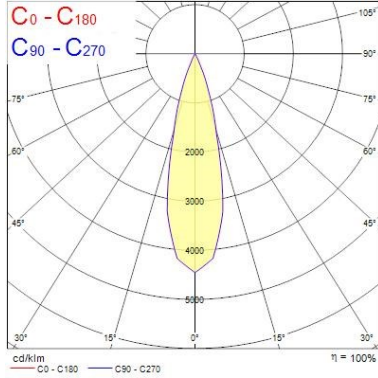

Distance [m]	Cone diameter [m]	E(0°) [lx]	E(C0) [lx]	Beam diameter [m]	Illuminance [lx]
0.5	0.23	1250	13.2°	5525	
1.0	0.47	3125	13.2°	1486	
1.5	0.70	1389	13.2°	647	
2.0	0.94	781	13.2°	364	
2.5	1.17	500	13.2°	233	
3.0	1.41	347	13.2°	152	

Distance [m] Cone diameter [m] Illuminance [lx]
 C0 - C180 (Half beam angle: 26.4°)

TECHNICAL DRAWINGS



Dimensions (mm)