




Color: ■ black

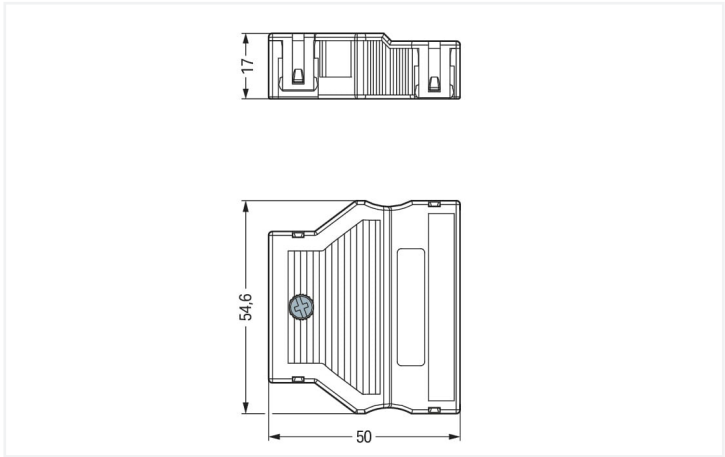

Dimensions in mm

Strain relief housing WINSTA® MIDI 5-pole

Realize the energy supply easily and quickly: The strain relief housing from the WINSTA® MIDI product line is the solution for error-free electrical installation. An extensive range of accessories complements the WINSTA® product line from WAGO. The WINSTA® MIDI Pluggable Connection System with Push-in CAGE CLAMP® spring pressure connection technology facilitates safe electrification. Thanks to the built-in test slot, it is possible to check connections even when they are plugged in. This saves time, labor, and money. A range up to 55 mm can be used for the strip length.

Push-in CAGE CLAMP® spring pressure connection technology – pluggable installation instead of laborious screw connections!

The WINSTA® Pluggable Connection System is ideally tailored to the strict requirements of building installation. It makes electrical installation pluggable, and consequently faster, more reliable, and error-free. Use of this pre-assembled system reduces assembly times and errors during installation at the construction site. Now you can also reduce installation expenses without compromising quality and safety: The WINSTA® MIDI accessory eliminates the need for servicing and prevents unnecessary downtime.

- pre-assembled versions
- rapid, structured electrical installation

Connection data

Connection 1	
Pole number	5
Connectable sheathed cable diameter	5 ... 9 mm
Strip length (outer insulation)	55 mm

Physical data

Width	54.6 mm / 2.15 inches
Depth	50 mm / 1.969 inches





Material data	
Note (material data)	Information on material specifications can be found here
Color	black
Material group	I
Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.613 MJ
Weight	13.7 g

Environmental requirements	
Processing temperature	-5 ... +40 °C
Continuous operating temperature	-35 ... +85 °C
Note on continuous operating temperature	Insulating parts for temperatures ≤ 105 °C

Commercial data	
Product Group	20 (Winsta)
eCl@ss 10.0	27-44-06-92
eCl@ss 9.0	27-44-06-92
ETIM 8.0	EC002863
ETIM 7.0	EC002863
PU (SPU)	25 pcs
Packaging type	Box
Country of origin	DE
GTIN	4044918065580
Customs tariff number	39269097900

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Approvals / Certificates

General approvals			Approvals for marine applications		
					
Approval	Standard	Certificate Name	Approval	Standard	Certificate Name
cURus Underwriters Laboratories Inc.	UL 1977	E45171	DNV GL Det Norske Veritas, Germanischer Lloyd	-	TAE00001Z6
VDE VDE Prüf- und Zertifizierungsinstitut	EN 61535	40029808	LR Lloyds Register	IEC 61984	LR22429487TA



Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance
770-505/023-000

↓

Documentation

Bid Text			
770-505/023-000	19.02.2019	xml 2.74 KB	↓
770-505/023-000	12.03.2015	doc 23.50 KB	↓

CAD/CAE-Data	
<div>CAD data</div> <div>2D/3D Models 770-505/023-000</div> <div>↓</div>	<div>CAE data</div> <div>WSCAD Universe 770-505/023-000</div> <div>↓</div> <div>ZUKEN Portal 770-505/023-000</div> <div>↓</div>

- 1 Compatible Products
- 1.1 Optional Accessories
- 1.1.1 Marking
- 1.1.1.1 Marking strip



Item No.: 210-333
Marking strips; as a DIN A4 sheet; Strip width 6 mm; Strip length 182 mm; plain; Self-adhesive; white