


Cord pushbutton



Use


Cord pushbutton for lighting and other loads.

Range

Designation	Item
Cord pushbutton 1P (NO/NC)	<input type="checkbox"/> YW4033
10A - 250Va.c.	<input type="checkbox"/> YG4033
1 module	<input type="checkbox"/> YD4033

Colors: ☐ White ☐ Stone ☐ Dark

Overall dimensions (mm)

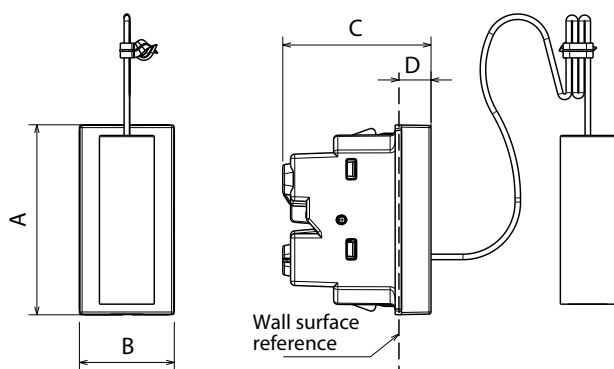

A	B	C	D
45.1	22.5	35.2	8.6

Connection

Terminal type: screw clamp
Terminal capacity: 2 x 4 mm² max
Stripping length: 9 mm
Compatible with flexible or rigid cables

Technical characteristics

- **Protection index:**
(considering a complete installation, including cover plate)
 - Penetration by solid bodies/liquid: IP40
 - Impact test: IK04
- **Material characteristics:**
 - Case: PC (polycarbonate)
 - Key cover: ABS
 - Halogen Free
 - UV resistant
 - Self-extinguishing:
 - 850°C/30s for insulating parts holding live parts in place.
 - 650°C/30s for other parts made of insulating material.
- **Electrical characteristics:**
 - Voltage: 250 V a.c.
 - Current: 10A
- **Climatic characteristics:**
 - Storage temperature: -10° C a +70° C
 - Use temperature: -5° C a +35° C

Cleaning

Clean the surface with a cloth.
Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Caution: Always test before using special cleaning products.

Standards and approvals

Compliance with standards IEC/EN/CEI 60669-1.

Refer to e.catalogue.