


Flush-mounted device designed to control functions on KNX systems. Each channel can be configured individually or in combination to manage functions such as on/off (on/off), dimming, shutter control, scene management, priority and timed commands. Each channel is equipped with RGB LEDs for load status indication and nighttime localization. It also includes a built-in buzzer for audible feedback upon touch and a proximity sensor for automatic activation of the user interface. The module is compatible with standard flush-mount boxes and installs in Chorus series holders, occupying a space equivalent to three modules.

Communicatie	KNX	Aant. DIN- modules	3
Voeding	Via KNX BUS, 29 V DC SELV	Interfaces	KNX TP1
Door KNX bus geabsorbeerde stroom (mA)	25mA max	Aant. uitgangs kanalen	6
Verbinding met de KNX bus	KNX busklem	Bedrijfs temperatuur	-5 ÷ +45 °C
Opslagtemperatuur	-25 ÷ +55 °C	IP waarde	IP20
Standaard	Richtlijn laagspanning 2014/35/EU Richtlijn elektromagnetische compatibiliteit 2014/30/EU, EN 50491, EN 60669-2-5	Kleur	-

DIMENSIONAL

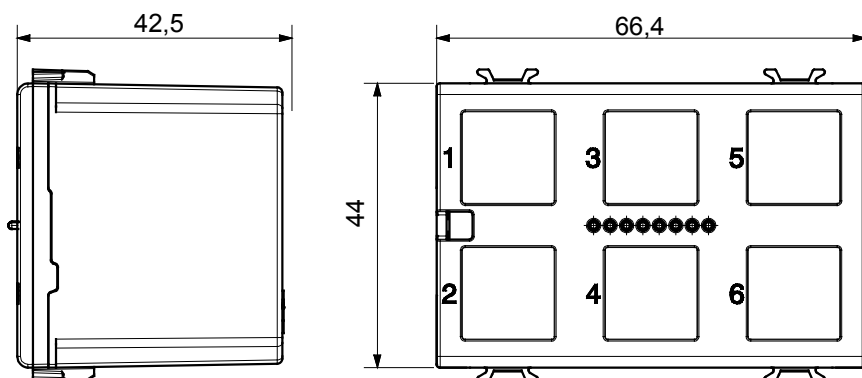

TECHNICAL SYMBOLOGY

IP

IP20

STANDARDS/APPROVALS

