

Y4004

.4004

.4004M2

### Use

Rocker control device for lighting and other loads.

### Range

#### Designation

#### Item


Four-way 1P 10AX - 250Va.c.  
lightable with led lamp (see table below)

- ☐ YW4004 - YW4004M2
- ☐ YG4004 - YG4004M2
- ☐ YD4004 - YD4004M2
- ☒ Y4004

LED Color	230 Va.c.	12/24 Va.c.
White	LN4742V230T	LN4742V12T
Blue	LN4742V230B	

**Colors:** ☐ White ☐ Stone ☐ Black

### Overall dimensions (mm)

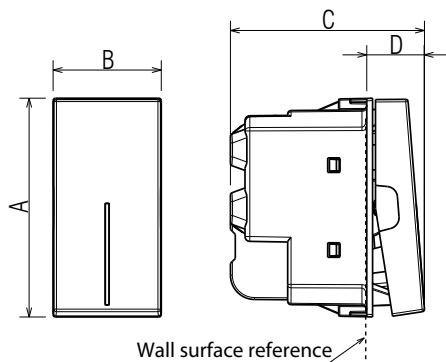

	A	B	C	D
..4004/ ..4004 / ..4004 / Y4004	45.1	22.3	38.1	11.9
..4004M2 / ..4004M2/ ..4004M2	45.1	44.7	38.1	11.9

### Connection

Terminal type: screw clamp  
Terminal capacity: 2 x 4 mm<sup>2</sup> max  
Stripping length: 9 mm  
Compatible with flexible or rigid cables

### Technical characteristics

- **Protection index:**  
(considering a complete installation, including cover plate)

- Penetration by solid bodies/liquid: IP40
- Impact test: IK04

- **Material characteristics:**

- Case: PC (polycarbonate)
- Key cover : ABS
- Halogen Free
- UV resistant
- Self-extinguishing:

850°C/30s for insulating parts holding live parts in place.  
650°C/30s for other parts made of insulating material.

- **Electrical characteristics:**

- Voltage: 250 V a.c.
- Current: 10AX

- **Climatic characteristics:**

- Storage temperature : -10° C a +70° C
- Use temperature: -5° C a +35° C

### Cleaning

Clean the surface with a cloth.  
Do not use acetone, tar-removing cleaning agents or trichloroethylene.

**Caution: Always test before using special cleaning products.**

### Standards and approvals

Compliance with standards IEC/EN 60669-1.  
Refer to e.catalogue.