



LIGHTnow

Socket outlet - German standard

YW4141 - YG4141 - YD4141 - Y4141R - Y4141G
YW4141G - YG4141G - YD4141G - Y4141GR - Y4141GG
YW4141P - YG4141P - YD4141P
YW4141PG - YG4141PG - YD4141PG



..4141.



..4141P

Use

Socket outlets for: German standard plugs.


Range

Designation	Item
	<input type="checkbox"/> YW4141 - YW4141G <input checked="" type="checkbox"/> YG4141 - YG4141G <input checked="" type="checkbox"/> YD4141 - YD4141G <input checked="" type="checkbox"/> Y4141R <input checked="" type="checkbox"/> Y4141G
Socket 2P+E 16A 250 VAC - socket with earth side contacts - shielded tulip contacts	<input type="checkbox"/> YW4141P - YW4141GP <input checked="" type="checkbox"/> YG4141P - YG4141GP <input checked="" type="checkbox"/> YD4141P - YD4141GP
Socket 2P+E 16A 250 VAC - socket with earth side contacts - shielded tulip contacts with IP20 Flap	<input type="checkbox"/> YW4141P - YW4141GP <input checked="" type="checkbox"/> YG4141P - YG4141GP <input checked="" type="checkbox"/> YD4141P - YD4141GP

Color code:

White Stone Dark
 Green Red

Overall dimensions (mm)

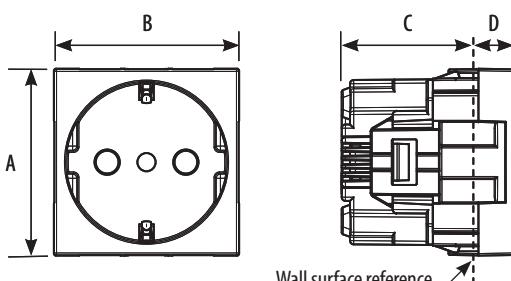

	A	B	C	D
..4141.	45.1	44.7	31.7	8.6
..4141C	45.1	44.7	31.7	12.1

Connection

Terminal type: screw clamp

Terminal capacity: 2 x 4 mm² max

Stripping length: 11 mm

Compatible with flexible or rigid cables

Technical characteristics

- Protection index

(considering a complete installation, including cover plate)
Penetration by solid bodies/liquid: IP20D

- Mechanical characteristics

Impact test: IK 04

- Material characteristics

Case and Key cover: PC (Polycarbonate)

Halogen free.

UV resistant.

Self-extinguishing:

850°C / 30 s for insulating parts holding live parts in place
650°C / 30 s for other parts made of insulating materials

- Electrical characteristics

Voltage: 250 VAC

Current: 16 A

- Climatic characteristics

Storage temperature: - 10°C to + 70°C

Use temperature: - 5°C to + 35°C

Cleaning

Clean the surface with a cloth.

Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Caution: Always test before using special cleaning products.

Standards and approvals

Compliance with standards IEC 60884-1.

Refer to e.catalogue.