

Concord

MYRIAD ADJ TWIN WHITE 2700K PHDIM WHITE BZ 2056242



Features

- The Myriad Adjustable Twin recessed spotlight is a high efficient accent downlight with double head lights, fixture color RAL 9016 - Traffic white / Bezel, correlated colour temperature of 2700K, color rendering index Ra119, fixture lumen 567x 2lm, total power consumption 20W, luminaire efficacy 57 lm/W, nominal light beam angle 24°, mains voltage 230-240V~ AC, control technology type: leading edge/trailing edge phase dim, product length 193mm, width 90mm, height 115mm, cut-out dimension 176x72mm, IP rating IP20, 5 years warranty.

Product Overview


Product name	MYRIAD ADJ TWIN WHITE 2700K PHDIM WHITE BZ
Technology	LED
Cap/Base	N/A
Mount	Ceiling recessed mounting
Environment	Indoor
Fixture luminous flux (lm)	567x 2
Luminaire efficacy (lm/W)	57
LOR (%)	100
Colour temperature (K)	2700
Light colour	Candlelight
CRI (Ra)	85
Colour Variation Initial (SDCM)	3
Photobiological Risk Group	RG1
Total power consumption (W)	20
Electrical protection	Class II
Control gear type	Electronic ballast
Control gear mounting	Integral
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20

Concord

MYRIAD ADJ TWIN WHITE 2700K PHDIM WHITE BZ 2056242

IK rating	IK02
Product EAN number	5025768562428
Warranty	5 years

Technical drawings

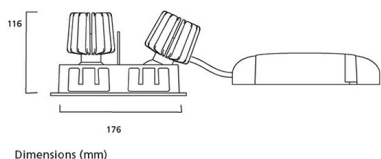

Data table

GENERAL DATA

Product name	MYRIAD ADJ TWIN WHITE 2700K PHDIM WHITE BZ
Technology	LED
Cap/Base	N/A
Mount	Ceiling recessed mounting
Environment	Indoor
Performance ambient temperature Tq (°C)	25
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	567x 2
-----------------------------------	--------

Concord

MYRIAD ADJ TWIN WHITE 2700K PHDIM WHITE BZ 2056242

Luminaire efficacy (lm/W)	57
LOR (%)	100
Colour temperature (K)	2700
Light colour	Candlelight
CRI (Ra)	85
Colour Variation Initial (SDCM)	3
Adjustable chromaticity	N
Photobiological Risk Group	RG1

ELECTRICAL DATA

Total power consumption (W)	20
Primary Supply/Product voltage - min (V)	230
Electrical protection	Class II
Control gear required	No
Control gear type	Electronic ballast
Control gear mounting	Integral
Drive current (mA)	250
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz

LIFETIME DATA

Lifespan L70 B50	100000
Lifespan L80 B20	100000
Lifespan L90 B10	68500

PHYSICAL DATA

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK02
Diffuser finish	Frosted
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	193
Nominal Product Width (mm)	90

Concord

MYRIAD ADJ TWIN WHITE 2700K PHDIM WHITE BZ 2056242

Weight (kg)	0.65
Recessed Depth (mm)	115

PACKAGING

Single packaging type	Carton
Product EAN number	5025768562428
Packaging single width (cm)	25.0
Packaging single depth (cm)	12.5
DUN14 (outer)	05025768562428
Packaging outer length / height (cm)	27.5

SAFETY DATA

Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No