

Expospot 70 adjustable


EXPOSPOT 70 ADJUSTABLE RA90 4000K WB WHITE

2070026



Product features

- Integrated LED adjustable accent downlight, single head, ideal for retail and display applications, die-cast aluminium body, passive cooling, beam angle: 52°, optics: aluminium reflector and lens combination, colour temperature: 4000K neutral white, total system power: 21W, total fixture output: 1988lm, 95lm/W, LOR: 100%, colour rendering: Ra 90 typical, LED Chromacity: 3 step MacAdam ellipse, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, electronic driver, non-dimmable, electrical protection: CLASS II, ingress protection rating: IP20, suitable for internal environment only, ceiling cut-out: 126mm, outer dimensions: 137x101mm, weight: 0.52kg.

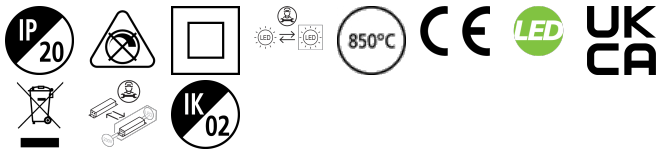



PRODUCT OVERVIEW

Product name	EXPOSPOT 70 ADJUSTABLE RA90 4000K WB WHITE
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
Fixture rating	Enclosed
General application	Hospitality, Museums & Galleries, Retail
ETIM Class	EC001744
Warranty	5 years
Fixture luminous flux (lm)	1988
Luminaire efficacy (lm/W)	95
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	52
Photobiological Risk Group	RG1
Total power consumption (W)	21
Electrical protection	Class II
Control gear type	LED driver constant current
Control gear mounting	Remote
Dimmable	No
Dimming method	N/A
Housing colour	White
IP rating	IP20
IK rating	IK02
Product EAN number	5025768700264

PHOTOMETRY

Expospot 70 adjustable

EXPOSPOT 70 ADJUSTABLE RA90 4000K WB WHITE
2070026

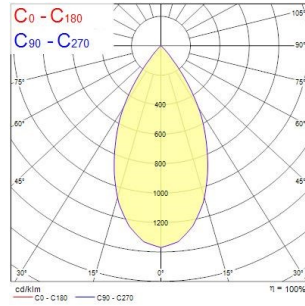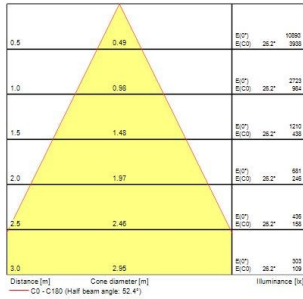

TECHNICAL DRAWINGS

